

Everything for your HMI Running



Touch.Keypad.Display

Human/Machine Interfaces

Magelis™ Panel PC
Magelis™ BOX PC

Catalog

October 2013



How to find the “Automation and Control” products


> Catalogs

Complete product ranges



> Essential guides

Selection of the top selling products

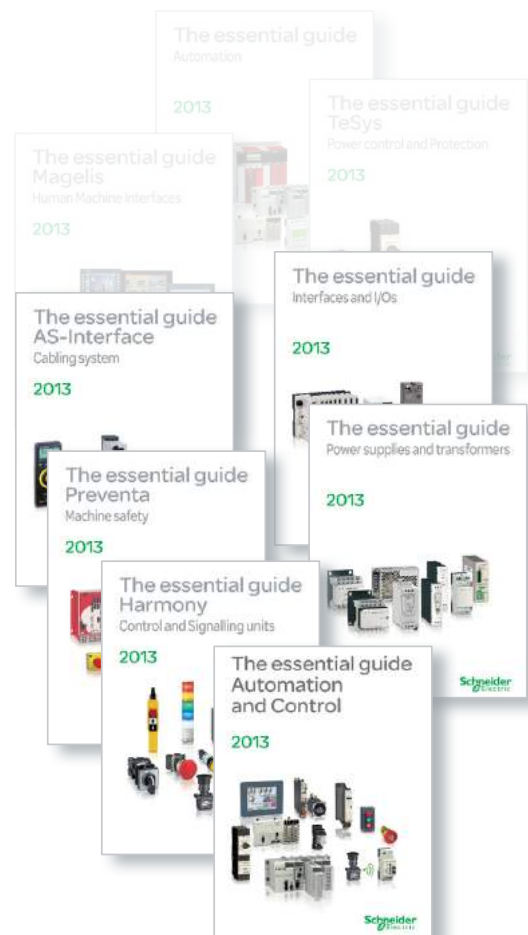

General contents

General presentation and selection guide..

1

Magelis™ Panels PC.....

2

Magelis™ BOX PC

3

How to find products, index

4

General presentation and selection guide

Magelis™ Panel PC and Magelis™ BOX PC

■ General presentation

- Rugged and certified for automation applications page 1/2
 - Rugged for various environments page 1/2
 - Certified for automation systems page 1/2
- Choice of design page 1/2
 - Optimized design with Optimum range page 1/2
 - Modular and flexible design with Universal and Performance ranges page 1/3
- Ease of IT integration page 1/3
 - Vijeo Designer and Vijeo Citect bundle offer page 1/3
 - Integration into IT structures page 1/3

Selection guide page 1/4



Industrial PCs

Magelis™ iPCs certified for automation

Rugged and certified for automation applications,
Choice of design

1

Magelis Panel PC and Magelis BOX PC

The Magelis iPC products are rugged and certified for automation applications and can be used in Maintenance-free, Harsh, and Standard industrial environments depending on the model.

The range consists of Magelis Panel PC (Optimum, Universal and Performance) with optional stainless steel bezel for dedicated applications and Magelis BOX PC (Universal and Performance).



Magelis Panel PC



Magelis BOX PC

Rugged and certified for automation applications

Rugged for various environments

The Magelis iPC range is extremely rugged, with maintenance-free models (no fan, static storage), LED backlight for Panel PC, high availability options (RAID HDD and Battery backup) and integrated system monitoring. Their resistance to temperature, vibration and shock allows them to operate continuously in extremely difficult environments.

The Magelis iPCs are suitable for automation requirements regarding Worldwide long-term availability, overlap timing to replace legacy ranges with same cut-out and extended timing for repair service.

Certified for automation systems

The Magelis iPC range is certified with the following:

- cULus (UL 508, CSA 22.2 no. 142), Industrial Control Equipment
- cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n° 213)
- ATEX II 3 Gas and Dust zone 2/22 in explosive atmospheres (1)
- Germanischer Lloyd (Bridge Class) for marine applications (1)
- C-Tick, GOST
- EN 1672-2 and FDA 21CFR 177.206 standards for Panel PC with stainless steel bezel

Certified for use in the most demanding automation systems, including industrial control equipments, hazardous locations, and marine applications.

Choice of design

Optimized design with Optimum range

The Panel PC Optimum range is designed for simple applications requiring capabilities like maintenance-free, entry level CPU, limited connectivity, static cards for storage, and Windows embedded OS. These screens which are aesthetically and ruggedly designed are also certified for automation.



Magelis Panel PC (Optimum)

- Resistive touch screen 10", 15" or 15" stainless steel, 16 million colors, IP 65, LED backlight.
- Intel® Atom™ Z510 1.1GHz fanless, 1Gb RAM.
- 2 gigabit Ethernet, 1 RS 232, 2 USB + 1 in front.
- Compact Flash (SLC technology), 1 SD card slot.

(1) Depending on the model.



Magelis iPCs → The new generation of industrial PCs

Choice of design (continued)

Modular and flexible design with Universal and Performance ranges

The modular design of Magelis Universal and Performance iPCs provides a complete and coherent range of referenced products. In addition, it allows Magelis Panel PCs and Magelis BOX PCs to be made-to-order.



- Magelis Panel PC (Universal or Performance)
- Resistive touch screen 12", 15", 15" stainless steel or 19", 16 million colors, IP 65, LED backlight.
 - Intel® Atom™ N270 1.6 GHz, Core™ 2 Duo 2.26 GHz or iCore™ 3rd generation.
 - 0 to 2 PCI/PCI Express® slots, removable drives.
 - 2 gigabit Ethernet, 4 USB + 1 in front, 1 DVI, up to 4 serial lines.



- Magelis BOX PC
- 2 gigabit Ethernet, 4 USB + front, up to 2 DVI and 3 serial lines.
 - Intel® Atom™ N270 1.6 GHz or Core™ 2 Duo 2.26 GHz.
 - 1 to 5 PCI/PCI Express® slots.
 - Removable drives: Compact Flash (SLC), Flash Disk (SSD) or HDD and DVD-RW.

Ease of IT integration

Vijeo Designer and Vijeo Citect bundle offer

Magelis iPCs support Vijeo Designer's "Intelligent Data Service" option and process Vijeo Designer data.



Magelis iPCs are supplied with Vijeo Designer Run Time Demo software (21-day trial version) including the Pac Drive driver which enables Magelis iPCs to interact directly with motion controllers.

Dedicated Magelis iPC models are bundled with Vijeo Citect SCADA software:

- DVD with software and documentation
- USB key with registered user rights
- 1-year support contract

SSD drives are used for SCADA systems due to large number read/write operations on storage drives. Vijeo Citect Web client is also available on models with Compact Flash storage drives. For field maintenance operations, "Build Time" versions of Unity and SoMachine PLC programming software are supported (requires minimum 2 GB RAM).

Integration into IT structures

Magelis iPCs run on Microsoft operating systems allowing connection of PC peripherals, large data storage, ease of connection to computers and databases, and simultaneous operation of several programs.

Depending on the iPC models, a wide choice of compatible operating systems are available.



2 built-in Ethernet ports of Magelis iPCs separate the IT and automation data flow, reinforcing the overall safety of the system.

+ Magelis iPCs → Ready for automation

Industrial PCs

Magelis™ iPCs certified for automation
Magelis™ Panel PC and Magelis™ BOX PC

Type of Magelis iPC
Industrial environments

Magelis Panel PC		
Optimum range	Universal range	
Maintenance-free	Maintenance-free	Standard



Fanless	★★★★★	★★★★★	★★★★★ (15" and 19" only)
Non-rotative storage drive	★★★★★	★★★★★	–
Sizes of color touch screen and front panel bezel material	<input type="checkbox"/> 10.4" Aluminium bezel <input type="checkbox"/> 15" Aluminium or Stainless steel bezel <input type="checkbox"/> 12" Aluminium Bezel <input type="checkbox"/> 15" Aluminium or Stainless steel bezel <input type="checkbox"/> 19" Aluminium bezel		
CPU (1)	Processor	Intel® ATOM™ Z510 (1.1 GHz) Intel® iCore™ 3rd Generation 827E low power or Intel® ATOM™ N270 (1.6 GHz)	
	PCI slot	0	
	Storage	Compact Flash card (SLC technology) and integrated SD card reader	Compact Flash card (SLC technology) or Flash disk SSD Hard disk
	RAM	1 or 2 GB	
Operating system	Windows® Embedded Standard 2009	Windows® Embedded Standard 2009 or Windows® XP or Windows® 7 Ultimate 64-bit Professional SP3	Windows® XP Professional SP3
Supply voltage	Aluminium bezel versions	24 V ~	
	Stainless steel bezel versions	– 24 V ~	
Standards and certifications	<input type="checkbox"/> CE <input type="checkbox"/> cULus <input type="checkbox"/> cULus Haz Loc <input type="checkbox"/> ATEX II 3 Gas and Dust Zone 2/22 (Optimum range 15" Stainless steel bezel version only) and <input type="checkbox"/> ATEX II 3 Dust Zone 22 (Universal range 15" Stainless steel bezel version only) <input type="checkbox"/> EN 1672-2 Food and beverage processing machines and FDA 21CFR 177.206 specific seals (Stainless steel bezel versions only) ...		
Marine certification	Bridge Class (only 24 V ~ Magelis Panel PC with 15" or 19" touch screen and Aluminium bezel) Require additional power supply filter HMIYLFIMAR11		–
Software	Vijeo Designer Run Time Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC) (2) Vijeo Citect, depending on the model		
References	Aluminium bezel versions	HMIPWC●●●●●●●● HMIPUC●●●●●●●● HMIPUH●●●●●●●●	
	Stainless steel bezel versions	HMIPVC7D0E01 HMIPTF7D2P01 HMIPTH7D2P01	
Pages	2/2 and 2/3	2/6 and 2/7, 2/14 to 2/17	
Made-to-order configuration	See configured Magelis Panel PC on page 2/27		

(1) For other options available (interface for backup battery, 3rd serial port, etc.) in made-to-order configuration, see pages 2/27 (Magelis Panel PC) and 3/10 (Magelis BOX PC).
 (2) 12" Aluminium Bezel models require additional SRAM interface HMIYPINSRAM61.
 (3) Refer to "Magelis™ iDisplay catalog" on www.schneider-electric.com.

Magelis Panel PC	
Performance range	Standard
Maintenance-free or Harsh	Standard

Magelis BOX PC			
Universal range		Performance range	
Maintenance-free	Standard	Harsh	Standard



★★★★★ (12" only)	–	★★★★★	–	–	–
★★★★★	–	★★★★★	–	★★★★★	–
<input type="checkbox"/> 12" Aluminium Bezel <input type="checkbox"/> 15" Aluminium or Stainless steel bezel <input type="checkbox"/> 19" Aluminium bezel		Compatible with all screens in the Magelis iDisplay range (3)			
Intel® i3 3rd generation 3217UE Dual Core low power or Core 2 Duo P8400 (2.26 GHz)		Intel® ATOM™ N270 (1.6 GHz)		Intel® Core™ 2 Duo P8400 (2.26 GHz) + Intel® GM45 chipset	
0 or 2		1 or 2		2 or 5	
Flash disk SSD	Hard disk	Compact Flash card (SLC technology) or Flash disk SSD	Hard disk	Flash disk SSD	Hard disk
2 or 4 GB		1 or 2 GB		2 or 4 GB	
Windows® 7 Ultimate 64-bit		Windows® Embedded Standard 2009 or Windows® XP Professional SP3	Windows® XP Professional SP3	Windows® 7 Ultimate 64-bit	
24 V ~ or 100...240 V ~		24 V ~		–	
100...240 V ~		–		–	
<input type="checkbox"/> CE <input type="checkbox"/> cULus <input type="checkbox"/> cULus Haz Loc <input type="checkbox"/> ATEX II 3 Dust Zone 22 (Stainless steel bezel versions only) <input type="checkbox"/> EN 1672-2 Food and beverage processing machines and FDA 21CFR 177.206 specific seals (Stainless steel bezel versions only) ...		<input type="checkbox"/> CE <input type="checkbox"/> cULus <input type="checkbox"/> cULus Haz Loc <input type="checkbox"/> ATEX II 3 Dust Zone 22 ...		–	
–		Bridge Class		–	
Vijeo Designer Run Time Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC) (2) Vijeo Citect, depending on the model					
HMIPPF●●●●●●●●	HMIPPH●●●●●●●●	HMIBUCN●●●●●●●●	HMIBUHN●●●●●●●●	HMIBPFD●●●●●●●●	HMIBPHD●●●●●●●●
–	HMIPRH7A2701	–	–	–	–
2/14 to 2/17		3/2 and 3/3			
See configured Magelis Panel PC on page 2/27		See configured Magelis BOX PC on page 3/10			

(1) For other options available (interface for backup battery, 3rd serial port, etc.) in made-to-order configuration, see pages 2/27 (Magelis Panel PC) and 3/10 (Magelis BOX PC).
 (2) 12" Aluminium Bezel models require additional SRAM interface HMIYPINSRAM61.
 (3) Refer to "Magelis™ iDisplay catalog" on www.schneider-electric.com.

Magelis™ Panel PC Optimum range

Selection guide page 2/2

■ Presentation

- Overview of Optimum range
 - Magelis Panel PC Optimum range page 2/4
 - Made-to-order Magelis Panel PC Optimum range page 2/4

■ Description

- 10.4" and 15" (aluminium or stainless steel bezel) page 2/4
 - Front panels page 2/4
 - Common rear panel page 2/4
 - Common underside page 2/4
- USB accessories for HMI terminals page 2/5

■ Reference

- Magelis Optimum Panel PC - 10.4" or 15" LCD TFT LED touch screen page 2/5

Magelis™ Panel PC Universal and Performance ranges

Selection guide of Magelis Panel PC Universal and Performance with 12" touch screen page 2/6

■ Presentation

- Overview of the range
 - Magelis Panel PC Universal with 12" touch screen page 2/8
 - Magelis Panel PC Performance with 12" touch screen page 2/9
 - Made-to-order Magelis Panel PC Universal and Performance ranges page 2/9

■ Description

- Magelis Universal and Performance Panel PC: 12" page 2/10
- Magelis Universal and Performance Panel PC: 12", without Slots expansion module page 2/10
- Magelis Universal and Performance Panel PC: 12", without Slots expansion module page 2/11
- Magelis Universal and Performance Panel PC: 12", with Slots expansion module page 2/12

■ References

- Magelis Universal Panel PC - 12" LCD TFT LED touch screen page 2/13
- Magelis Performance Panel - 12" LCD TFT LED touch screen page 2/13

Selection guide of Magelis Panel PC Universal range with 15" and 19" touch screens page 2/14

■ Presentation

- Overview of the range
 - Magelis Panel PC Universal range with 15" and 19" touch screens page 2/18
 - Magelis Panel PC Performance range page 2/19
 - Made-to-order Magelis Panel PC Universal and Performance ranges page 2/19
- USB accessories for HMI terminals page 2/19

■ **Description**

- Magelis Universal and Performance Panel PC 15" and 19" *page 2/20*
- Magelis Universal and Performance Panel PC,
15" and 19", no PCI slot *page 2/21*
- Magelis Universal and Performance Panel PC,
15" and 19", 2 PCI slots *page 2/21*

■ **Reference**

- Magelis Universal Panel PC - 15" LCD TFT LED touch screen *page 2/22*
- Magelis Performance Panel - 15" LCD TFT LED touch screen *page 2/23*
- Magelis Universal Panel PC - 19" LCD TFT LED touch screen *page 2/24*
- Magelis Performance Panel - 19" LCD TFT LED touch screen *page 2/25*

■ **Separate components for Magelis Panel PC** *page 2/26*

■ **Substitution**


- Configured Magelis Panel PC *page 2/29*

Industrial PCs

Magelis™ iPCs certified for automation
Magelis™ Panel PC
Optimum range with 10.4" or 15" touch screen

Type		Optimum range - 10.4" touch screen	
Industrial environments		Maintenance-free (with Aluminium front panel bezel)	
			
Fanless		★★★★★	
Non-rotative storage drive		★★★★★	
Screen	Type	10.4" LCD TFT LED touch screen	
	Definition	SVGA 800 x 600, 16 million colors	
	Degree of protection	IP 65 and Nema 4X indoor front panel protection when mounted on panel or enclosure door	
	Front panel bezel material	Aluminium	
CPU	Processor	Intel® ATOM™ Z510 (1.1 GHz)	
	Operating system storage	Compact Flash card ≥ 2 GB (SLC technology)	Compact Flash card ≥ 4 GB (SLC technology)
	User storage	Integrated SD card reader	
	RAM (1)	1 GB	2 GB
	Integrated ports	2 x Ethernet 10/100/1000 Mbps 1 x USB 2.0 (1 A) on the front panel + 2 x USB 2.0 (1 A) on the underside 1 x RS232C	
Operating system		Windows® Embedded Standard 2009	
Supply voltage	Voltage	24 V ~ (± 25 %)	
	Current	Nominal current 1.9 A. Typical inrush current 3 A, 50 A < 300 µs	
Overall dimensions (W x H x D)/Cut-out (W x H)		323 x 260 x 72 mm/Cut-out: 303 x 243 mm	
Temperature	During operation		0...50 °C, conforming to IEC 61132-2, UL 508
	Vibration resistance during operation		1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (2) 3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (2)
Shock resistance	during operation		15 g/11 ms conforming to IEC 60068-2-27 test Ea
	Standards and certifications		CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST
Marine certification	Germanischer Lloyd (Bridge Class)	-	
ATEX certification		-	
Software		Acrobat Reader, Word/Excel/Power Point Viewer, Framework.Net 3.5, Web browser Vijeo Designer Run Time Demo 21-day trial version (3) Vijeo Citect Web Client	
References of Aluminium bezel versions	With Vijeo Designer Run Time Demo, 21-day version (3)	HMIPWC5D0E01	HMIPWC5D0E01A
References of Stainless steel bezel versions	With Vijeo Designer Run Time Demo, 21-day version (3)	-	
Pages		2/5	
Made-to-order configuration		See configured Magelis Panel PC on page 2/27	


(1) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 2/27).
(2) Conforming to IEC 60068-2-6 Fc.
(3) Unlimited license, to be ordered separately (VJDSNRTMPC).

Type		Optimum range - 15" touch screen	
Industrial environments		Maintenance-free (with Aluminium or Stainless steel front panel bezel)	
			
Fanless		★★★★★	
Non-rotative storage drive		★★★★★	
Screen	Type	15" LCD TFT LED touch screen	
	Definition	XGA 1024 x 768, 16 million colors	
	Degree of protection	IP 65 and Nema 4X indoor front panel protection when mounted on panel or enclosure door	
	Front panel bezel material	Aluminium or Stainless steel	
CPU	Processor	Intel® ATOM™ Z510 (1.1 GHz)	
	Operating system storage	Compact Flash card ≥ 2 GB (SLC technology)	
	User storage	Integrated SD card reader	
	RAM (1)	1 GB	
	Integrated ports	2 x Ethernet 10/100/1000 Mbps 1 x USB 2.0 (1 A) on the front panel + 2 x USB 2.0 (1 A) at the bottom 1 x RS232C	
Operating system		Windows® Embedded Standard 2009	
Supply voltage	Voltage	24 V ~ (± 25 %)	
	Current	Nominal current 1.9 A. Typical inrush current 3 A, 50 A < 300 µs	
Overall dimensions (W x H x D)/Cut-out (W x H)		402 x 301 x 72 mm/Cut-out: 383.5 x 282.5 mm	
Temperature	During operation		0...50 °C, conforming to IEC 61132-2, UL 508
	Vibration resistance during operation		1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (2) 3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (2) 1 mm from 3...13.2 Hz, 0.7 g from 13.2...100 Hz, 90 minutes endurance
Shock resistance	during operation		15 g/11 ms conforming to IEC 60068-2-27 test Ea
	Standards and certifications		CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST EN 1672-2 Food and beverage processing machines and FDA 21CFR 177.206 specific seals (Stainless steel bezel versions only) Requires additional power supply filter HMIYLFIMAR11 (Aluminium bezel versions only)
ATEX certification		ATEX II 3 Gas and Dust zone 2/22 (Stainless steel bezel versions only)	
Software		Acrobat Reader, Word/Excel/Power Point Viewer, Framework.Net 3.5, Web browser Vijeo Designer Run Time Demo 21-day trial version (3) Vijeo Citect Web Client	
References of Aluminium bezel versions		HMIPWC7D0E01	
References of Stainless steel bezel versions		HMIPVC7D0E01	
Pages		2/5	
Made-to-order configuration		See configured Magelis Panel PC on page 2/27	


See configured Magelis Panel PC on page 2/27




10.4" and 15" Magelis PC Panel

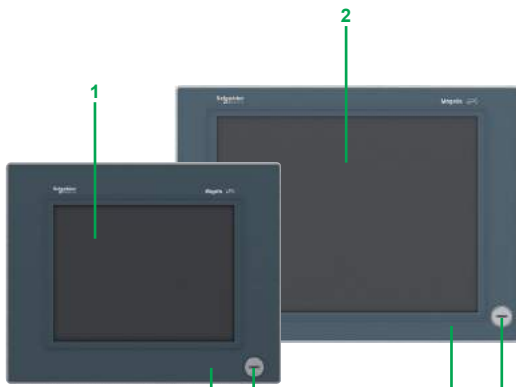


10.4" and 15" front panels Aluminum

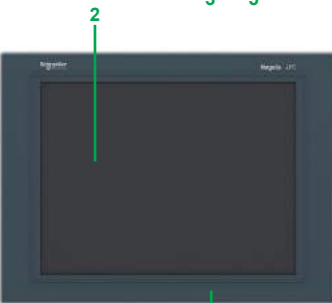

15" Stainless steel front panel

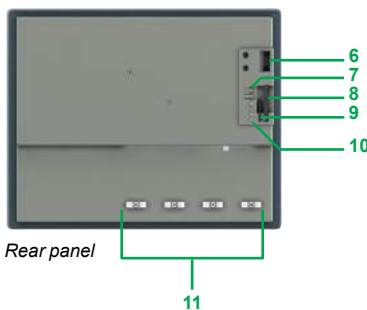

Rear panel



Underside

Presentation

The Magelis Panel PC Optimum range offers products that are rugged and certified for automation applications. These products, offering an optimized design also feature compact dimensions, particularly in terms of depth.

They are specifically designed for use in maintenance-free environments and can be easily integrated into IT systems. Versions are available with a stainless steel front panel bezel.

Overview of Optimum range

Magelis Panel PC Optimum range

The Magelis Panel PC Optimum range is equipped with a fanless Intel® ATOM™ Z510 processor (1.1 GHz) and DDR2 RAM (1).

This range is available with 10.4" or 15" LCD TFT LED touch screen of 16 million colors, fanless, with a solid-state storage disk:

- **HMIPWC5D0E01, HMIPWC5D0E01A and HMIPWC7D0E01:**
 - IP 65 and Nema 4X indoor front panel protection when mounted on a panel or an enclosure door
 - Compact Flash card (operating system)/integrated SD card reader (user data)/ Windows® Embedded Standard 2009/24 V --- power supply.

Made-to-order Magelis Panel PC Optimum range

On Magelis Optimum Panel PC bases, the CPU can be customized by selecting the capacity of RAM and Compact Flash card. For more information on HMIPCCW offer see page 2/29.

Description

10.4" (Aluminium bezel) and 15" (Aluminium or Stainless steel bezel) Magelis Optimum Panel PC

Front panels

- 1 10.4" LCD TFT LED touch screen (SVGA 800 x 600) with 16 million colors for **HMIPWC5D0E01** and **HMIPCW5D0E01A:**
 - Brightness: 450 cd/m² (adjustable)
 - Type of touch panel: Analog resistive film, resolution 4096 x 4096
 - Typical viewing angle: 120° (vertically)/160° (horizontally)
 - 2 15" LCD TFT LED touch screen (XGA 1024 x 768) with 16 million colors for **HMIPCW7D0E01:**
 - Brightness: 350 cd/m² (adjustable)
 - Type of touch panel: Analog resistive film, resolution 4096 x 4096
 - Typical viewing angle: 100° (vertically)/160° (horizontally)
 - 3 Aluminium alloy front panel providing IP 65 and Nema 4X indoor front panel protection when mounted on a panel or an enclosure door; mounted on 1.6...10 mm/0.063...0.394 in. thick support using the supplied screw fasteners (2)
- or
- Stainless steel 304 "Scotch Brite®" brushed finish front panel enabling an IP 65 and Nema 4X indoor degree of protection when mounted on a panel or an enclosure door. Mounted on 1.6...10 mm/0.063...0.394 in. thick support using stainless steel screw fasteners supplied (2). Simplifies cleaning because of the absence of USB port on front panel (conforms to food and beverage processing machines standard EN 1672-2). The front panel is fitted with specific seals (standard FDA 21 CFR 177.206)
- 4 USB 2.0 port (1 A max.) with screw-on protective cover (only available for Aluminium version); captive protective cover option also available (3)

Common rear panel

- 5 Battery
- 6 2 pushbuttons: 1 for power supply and 1 for resetting
- 7 Compact Flash card (SLC technology) ≥ 2 or 4 GB specifically for the operating system
- 8 SD card reader for user data - SD card optional (3)
- 9 4 status and power supply LEDs
- 10 Cable clamps

Common underside

- 11 24 V ---/1.9 A power supply connector
- 12 2 USB 2.0 ports (1 A max.)
- 13 2 Ethernet 10/100/1000 Mbps ports
- 14 RS232C port

(1) Not user-expandable; increased capacity available in made-to-order configuration (see page 2/27).

(2) For installation, please refer to the "product data sheet" on our website www.schneider-electric.com.

(3) To be ordered separately (see page 2/26).

USB accessories for HMI terminals

The Magelis™ USB accessories expand the selection range of user applications by offering value-added/differentiated HMI solutions. These innovative USB accessories can be easily installed and operated with HMI terminals (6).

The Magelis USB accessories supported by Magelis Panel PC include:

- Harmony XB5S biometric USB switch
- Magelis HMIZ illuminated USB switch

For more information on HMI USB accessories, please refer to our website www.schneider-electric.com.



HMIPWC5D0E01 (screen side)



HMIPWC7D0E01 (screen side)



HMIPWC•D0E01 (CPU side)

**Magelis Optimum Panel PC - 10.4" or 15" LCD TFT LED touch screen (1)
(Intel® ATOM™ Z510 processor (1.1 GHz)/DDR2 RAM/24 V ~ supply voltage) (2)**

Screen type	Operating system	Software	Storage	DDR2 RAM (3)	Reference	Weight kg/lb
For maintenance-free environment (with Aluminium front panel bezel)						
10.4" LCD TFT LED touch screen SVGA 800 x 600, 16 million colors IP 65 and Nema 4X indoor front panel protection when mounted on a panel or an enclosure door	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	Operating system: Compact Flash ≥ 2 GB User: 1 SD memory card reader (card available separately)	1 GB	HMIPWC5D0E01	4.400/ 9.700
	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	Operating system: Compact Flash ≥ 4 GB User: 1 SD memory card reader (card available separately)	2 GB	HMIPWC5D0E01A	4.400/ 9.700
15" LCD TFT LED touch screen XGA 1024 x 768, 16 million colors IP 65 and Nema 4X indoor front panel protection when mounted on a panel or an enclosure door	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	Operating system: Compact Flash ≥ 2 GB User: 1 SD memory card reader (card available separately)	1 GB	HMIPWC7D0E01	6.100/ 13.449
For maintenance-free environment (with Stainless steel front panel bezel)						
15" LCD TFT LED touch screen XGA 1024 x 768, 16 million colors IP 65 and Nema 4X indoor front panel protection when mounted on a panel or an enclosure door	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	Operating system: Compact Flash ≥ 2 GB User: 1 SD memory card reader (card available separately)	1 GB	HMIPVC7D0E01	6.300/ 13.889


(1) For separate components, software and external power supply see page 2/26.
 (2) For an ~ supply voltage, an external Phaseo power supply can be used (see page 2/26).
 (3) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 2/27).
 (4) Windows® Embedded Standard 2009 supplied in 9 languages (English, French, German, Italian, Portuguese, Spanish, Swedish, Chinese, Russian). Also includes:
 - Acrobat Reader, Word/Excel/Power Point Viewer
 - Framework.Net 3.5
 - Web browser
 - Vijeo Citect Web Client
 - Vijeo Designer Run Time Demo (5)
 (5) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC) (see page 2/26).
 (6) Requires Vijeo Designer software running on Magelis Panel PC.

Industrial PCs

Magelis™ iPCs certified for automation
Magelis™ Panel PC
Universal and Performance ranges with 12" touch screen

Type		Universal range - 12" touch screen	
Industrial environments		Maintenance-free (with Aluminium bezel)	
			
Fanless		★★★★★	★★★★★
Non-rotative storage drive		★★★★★	★★★★★
Screen		12" LCD TFT LED touch screen XGA 1024 x 768, 16 million colors IP 65 and Nema 4X indoor front panel protection when mounted on panel or enclosure door Aluminium	
CPU (1)		Intel® iCore™ 3 rd generation 827E low power	
Processor		-	
Fan		-	
Default storage (user removable)		CFAST card ≥ 4 GB (SLC technology)	Flash disk ≥ 60 GB
Storage slots (user accessible)		1 Cfast + 1 Slide-in Compact	
RAM (16 GB max. in 2 slots)		2 GB in 1 slot, user extendable (1)	
Slots expansion module		(to be added by user) (1)	
Integrated DVD-RW drive		(to be added by user) (1)	
Integrated ports		2x Ethernet 10/100/1000 Mbps 1x USB 2.0 (1 A) on the front panel + 4x USB 2.0 (0.5 and 1 A) at the top	
Optional ports		2 x RS232C	
Optional internal RAID		2 interface modules slots user accessible (1)	
Operating system		Windows® Embedded Standard 2009	Windows® 7 Ultimate 64-bit
Overall dimensions (W x H x D)/Cut-out (W x H)		313 x 239 x 60 mm/307.25 x 233.25 mm	
Temperature		During operation 0...50 °C, conforming to IEC 61132-2, UL 508	
Vibration resistance		Continuous 1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (conforming to IEC 60068-2-6 Fc)	
during operation		Non-continuous 3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (conforming to IEC 60068-2-6 Fc)	
		Merchant navy IACS E10 1 mm amplitude from 3...13.2 Hz, 0.7 g from 13.2...100 Hz, 90 minutes endurance	
Shock resistance		During operation 15 g/11 ms conforming to IEC 60068-2-27 test Ea	
Standards and certifications		CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST	
Software		Vijeo Designer Run Time Demo 21-day trial version. Unlimited license, to be ordered separately (VJDSNRTMPC) and requires additional SRAM interface HMIYPINSRAM61 (1)	
References of Aluminium bezel versions		HMIPUC6D0E01	HMIPUF6D0701
Pages		HMIPUC6A0E01	HMIPUF6A0701
Made-to-order configuration		2/13 See configured Magelis Panel PC on page 2/27	

(1) Other options (interface for backup battery, 3rd RS232/422/485 port, SRAM, PCI/Express® slots, extended RAM, etc.) to be installed by user or in made-to-order configuration (see page 2/27).
(2) Half size PCI 2.2 32-bit and half size PCI Express® 1.0 8x 2 Gb/s
(3) Conforming to IEC 60068-2-6 Fc.

Universal range - 12" touch screen		Performance range - 12" touch screen	
Standard (with Aluminium bezel)		Maintenance-free (with Aluminium bezel)	Standard (with Aluminium bezel)
			
★★★★★		★★★★★	-
-		★★★★★	-
12" LCD TFT LED touch screen XGA 1024 x 768, 16 million colors IP 65 and Nema 4X indoor front panel protection when mounted on panel or enclosure door Aluminium			
Intel® iCore™ 3 rd generation 827E low power		Intel® i3 iCore™ 3 rd generation 3217UE dual core low power	
1 (user exchangeable)		-	1 (user exchangeable)
Hard disk enterprise 24/7 ≥ 500 GB		Flash disk ≥ 60 GB	Hard disk enterprise 24/7 ≥ 500 GB
1 CFAST + 1 Slide-in Compact		1 CFAST + 1 Slide-in Compact + 1 slide-in (of Slots expansion module)	
2 GB in 1 slot, user extendable (1)		4 Gb in 1 slot, user extendable (1)	
(to be added by user) (1)		1 PCI + 1 Express® + 1 slide-in (Slots expansion module removable by user) (2)	
(to be added by user) (1)		1 (in slide-in of Slots expansion module)	
2x Ethernet 10/100/1000 Mbps		2x Ethernet 10/100/1000 Mbps	
1x USB 2.0 (5 A) on the front panel + 4x USB 3.0 (depending on OS and driver support at the bottom)		1x USB 2.0 (5 A) on the front panel + 4x USB 3.0 (depending on OS and driver support at the bottom)	
2 x RS232C		2 x RS232C	
2 interface modules slots user accessible (1)		2 interface modules slots user accessible (1)	
-		Require 2 HDD (1 in slide compact and 1 slide-in of the Slots expansion module)	
Windows® 7 Ultimate 64-bit			
313 x 239 x 60 mm/307.25 x 233.25 mm		313 x 239 x 135 mm/307.25 x 233.25 mm	
0...50 °C, conforming to IEC 61132-2, UL 508			
0.125 g from 5...100 Hz		1.75 mm from 2...9 Hz, (3) 0.5 g from 9...200 Hz (2)	0.125 g from 5...100 Hz
0.250 g from 5...100 Hz		3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (2)	0.250 g from 5...100 Hz
-			
15 g/11 ms conforming to IEC 60068-2-27 test Ea			
CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST			
21-day trial version. Unlimited license, to be ordered separately (VJDSNRTMPC) and requires additional SRAM interface HMIYPINSRAM61 (1)			
HMIPUH7D0P01		(by user removable AC module)	(by user removable AC module)
HMIPUH7A0P01		HMIPPF6A2701	HMIPPH6A2701
See configured Magelis Panel PC on page 2/13			

(1) Other options (interface for backup battery, 3rd RS232/422/485 port, SRAM, PCI/Express® slots, extended RAM, etc.) to be installed by user or in made-to-order configuration (see page 2/27).
(2) Half size PCI 2.2 32-bit and half size PCI Express® 1.0 8x 2 Gb/s
(3) Conforming to IEC 60068-2-6 Fc.

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ Panel PC

Universal and Performance ranges with 12" touch screen

2



12" Magelis Universal Panel PC



12" Magelis Performance Panel PC

Presentation

The Magelis Panel PC Universal and Performance ranges with 12" touch screen offer products that are rugged and certified for automation applications. They are suitable for various uses in the following environments:

- Maintenance-free
- Harsh
- Standard

The ultra-modular design of Panel PCs with 12" touch screen allows user to adapt the units configuration. Main options like interface for backup battery, 3rd RS232/422/485 port, SRAM, PCI/PCI Express® slots, extended RAM, fan if any, and AC power module are all user accessible. The 12" touch screen is an XGA LCD TFT LED 16 million color touch screen with IP 65 front panel protection when mounted on a panel or an enclosure door.

This modularity provides a complete and coherent offer. In addition, Magelis Panel PCs can be made-to-order (see page 2/27) or adapted by the user himself according to the current and future needs.

The Panel PCs are equipped with powerful iCore 3rd generation CPUs having extended graphic capabilities. These low power consumption CPUs when combined with aluminum die cast housing technology improves heat dissipation and allows fanless operations.

Overview of the range

Magelis Panel PC Universal with 12" touch screen (1)

The Magelis Panel PC Universal range with 12" touch screen is equipped with a low power Intel® iCore 3rd generation 827E and user-expandable DDR3 RAM.

This range is designed for the following environments:

- Maintenance-free (fanless, with non-rotating storage drive):
 - **HMIPUC6D0E01** and **HMIPUC6A0E02**:
 - No default PCI/PCI Express® slots, but Slots expansion module can be mounted by user
 - CFast card/Windows® Embedded Standard 2009
 - 24 V $\overline{\text{---}}$ power supply or 100...240 V \sim power supply module pre-mounted
 - **HMIPUF6D0701** and **HMIPUF6A0701**:
 - No default PCI/PCI Express® slots, but Slots expansion module can be mounted by user
 - Flash disk SSD/Windows® 7 Ultimate 64-bit
 - 24 V $\overline{\text{---}}$ power supply or 100...240 V \sim power supply module pre-mounted
- Standard industrial environments (with Hard disk):
 - **HMIPUH6D0701** and **HMIPUH6A0701**:
 - No default PCI/PCI Express® slots, but Slots expansion module can be mounted by user
 - Hard disk/Windows® 7 Ultimate 64-bit
 - 24 V $\overline{\text{---}}$ power supply or 100...240 V \sim power supply module pre-mounted

(1) For description, see pages 2/10 to 2/12.

Presentation (continued)

Overview of the range (continued)

Magelis Panel PC Performance with 12" touch screen (1)

The Magelis Panel PC Performance range with 12" touch screen is equipped with a low power Intel® i3 iCore 3rd generation 3217UE and user-expandable DDR3 RAM.

This range is designed for the following environments:

- Maintenance-free (fanless, with non-rotating storage drive):
 - **HMIPPF6A2701**
 - 1 PCI + PCI Express® (Half size PCI 2.2 32-bit and half size PCI Express® 1.0 8x 2 Gbps).
 - DVD-RW
 - Flash disk SSD/Windows® 7 Ultimate 64-bit
 - 100...240 V a power supply module pre-mounted (user removable access to 24 V ~ power supply)
- Standard industrial environments (with Hard disk):
 - **HMIPPH6A2701:**
 - 1 PCI + PCI Express® (Half size PCI 2.2 32-bit and half size PCI Express® 1.0 8x 2 Gbps).
 - DVD-RW
 - Hard Disk/Windows® 7 Ultimate 64-bit
 - 100...240 V ~ power supply module pre-mounted (user removable access to 24 V ~ power supply)

Made-to-order Magelis Panel PC Universal and Performance ranges

On Magelis Panel PC Universal and Performance bases, it is possible to configure the units by selecting:

- The capacity of the Compact Flash cards, CFast cards, Flash disk SSD and RAM
- The number of PCI and PCI Express® slots
- The operating system and dedicated HMI software
- Additional options: Internal RAID with 2 redundant Hard disks, interface for backup battery, power supply module, third RS 485 port

For more information on HMIPCC offer, see page 2/29.

(1) For description, see pages 2/10 to 2/12.


Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ Panel PC

Universal and Performance ranges with 12" touch screen

2

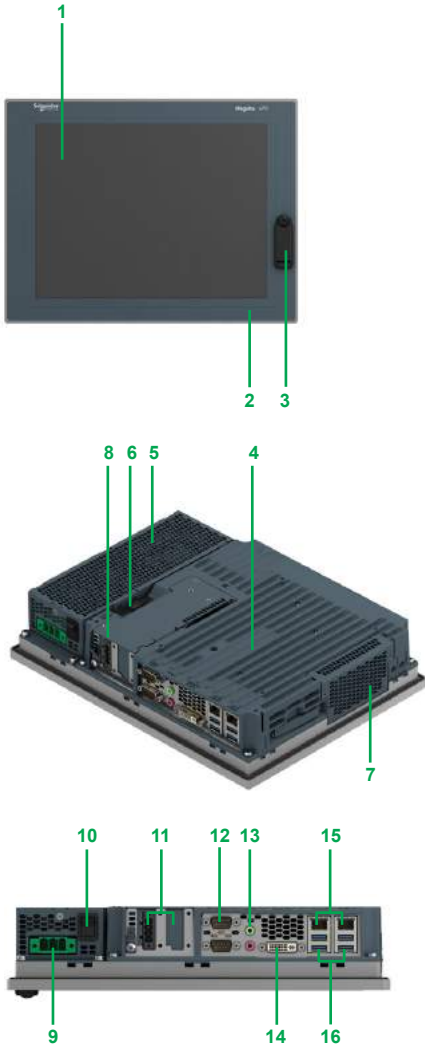

Description

Magelis Universal and Performance Panel PC: 12" (aluminium bezel)

Front panel

- 1 12" LCD TFT LED touch screen, XGA 1024 x 768, 16 million colors for **HMI●●6●●●●●●**:
 - Brightness: 500 cd/m² (stepless adjustable)
 - Type of touch panel: Analog resistive film, resolution 12-bit
 - Typical viewing angle: 80° (vertically)/80° (horizontally)
 - LED life span > 50 000 H at 25 °C (77 °F)
- 2 Aluminum alloy front panel providing IP 65 and Nema 4X indoor front panel protection when mounted on a panel or an enclosure door; mounted on 1.6...9 mm thick support using the screw fasteners supplied (1)
- 3 USB 2.0 port (0.5 A max.) with screw-on captive protective cover

Magelis Universal and Performance Panel PC: 12", without Slots expansion module

Rear panel

- 4 Aluminum die cast housing for improved heat dissipation. Combined with low power iCore 3rd generation CPUs, this technology allows fanless operations with static drives, up to 50 °C environment (1).
- 5 AC power module **HMIYPMAC61** (100...240 V ~, 45/65 Hz, 0.6... 2A) pre-mounted on Panel PC 12" **HMI●●●6A●●●** and user removable, or direct access to DC power connector for **HMI●●●6D●●●** (24 V ~ +/-25 %, 130 W max.) (2).
- 6 User access to internal battery backing up real-time clock (RTC) and BIOS settings
- 7 User access to the 2x DDR3 RAM slots and the Slide-in compact slot for storage drive
- 8 User access to interface module slots and mount Slot expansion module **HMI●●●●●** (3).

Underside

- 9 Connector for AC power module **HMIYPMAC61** (100...240 V ~, 45/65 Hz, 0.6...2A) pre-mounted on Panel PC 12" **HMI●●●6A●●●** and user removable, or direct access to DC power connector
- 10 On/Off switch for AC power module **HMIYPMAC61** pre-mounted on Panel PC 12" **HMI●●●6A●●●**
- 11 2 slots for interface modules with following restrictions:

Panel PC	Part Number	Slot 1	Slot 2
UPS interface module (3)	HMIYPUPI61	X	-
SRAM interface module (3)	HMIYPI61	-	X
RS232/422/485 interface module (3)	HMIYPI61	X	X

- 12 2 RS232C ports
- 13 Micro input, line input/line output
- 14 DVI port - RGB connection with adaptor (**HMIYADDVIRGB11**) (3)
- 15 2 Ethernet 10/100/1000 Mbps ports
- 16 4 USB 3.0 ports (1 A max.)

(1) For installation, please refer to the "product data sheet" on our website www.schneider-electric.com.

(2) Consumption excluding additional PCI/PCI Express® card.


(3) To be ordered separately as an accessory (see pages 2/26 and 2/27).

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ Panel PC

Universal and Performance ranges with
12" touch screen

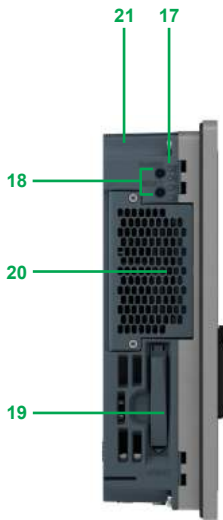

Description (continued)

Magelis Universal and Performance Panel PC: 12", without Slots expansion module

Side panel

17 4 status and power supply LEDs

18 2 pushbuttons: 1 for power supply and 1 for resetting

19 Slot for CFast card:

- With CFast (SLC technology) ≥ 4 GB (Panel PC **HMIPUC●D0E01**)
- Free slot (Panel PC **HMIP●●F6●0●●1**, **HMIP●H6●●0●●1**)

20 User access to the 2x DDR3 RAM slots expandable up to 16 GB and the Slide-in compact slot for storage drive:

- With 2 GB RAM in 1 slot (Panel PC **HMIPUC6●0E01**). Free slide-in compact slot can be used directly for an additional Flash disk SSD, Hard disk SSD or with adaptor (**HMIYADCF61**) (3) for a second CFast
- With 2 GB RAM in 1 slot + Flash disk SSD ≥ 60 GB (Panel PC **HMIPUF6●0701**)
- With 2 GB RAM in 1 slot + Hard disk ≥ 500 GB (Panel PC **HMIPUF6●0701**)

21 User access to fan (Panel PC **HMIP●H6●●●●●●**) (4) or natural convection (Panel PC **HMIP●C6●●●●●●** and **HMIP●F6●●●●●●**)

(3) To be ordered separately as an accessory (see page 2/26).


(4) User can add or replace fan, with fan kit **HMIYPFKT061** (to be ordered separately, see page 2/26).

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ Panel PC

Universal and Performance ranges with 12" touch screen

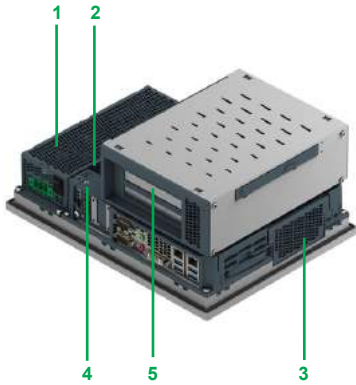


Description (continued)

Magelis Universal and Performance Panel PC: 12", with Slots expansion module

Rear panel

- 1 AC power module **HMIYPMAC61** (100...240 V ~, 45/65 Hz, 0.6...2A) pre-mounted on Panel PC 12" **HMI●●●6A●●●** and user removable, or direct access to DC power connector (24 V ~ +/-25 %, 130 W max.) (2).
- 2 User access to internal battery, backing up real-time clock (RTC) and BIOS settings
- 3 User access to the 2x DDR3 RAM slots and the Slide-in compact slot for storage drive
- 4 User access to interface module slots
- 5 Slot expansion module pre-mounted on Panel PC **HMIPP●6●2●●●**

2

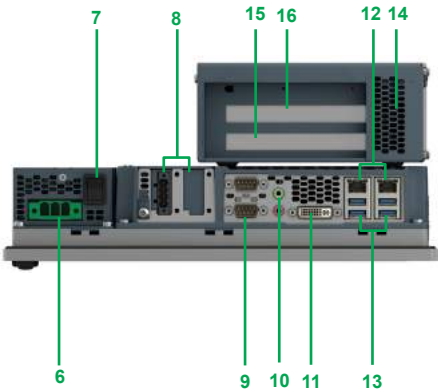

Underside


- 6 Connector for AC power module **HMIYPMAC61** (100...240 V ~, 45/65 Hz, 0.6...2A) pre-mounted on Panel PC 12" **HMI●●●6A●●●**, or direct access to DC power connector
- 7 On/Off switch for AC power module **HMIYPMAC61** pre-mounted on Panel PC 12" **HMI●●●6A●●●**
- 8 2 slots for interface modules with following restrictions:

Panel PC	Part Number	Slot 1	Slot 2
UPS interface module (3)	HMIYPUISINT61	X	-
SRAM interface module (3)	HMIYPIINSRAM61	-	X
RS232/422/485 interface module (3)	HMIYPIINSL61	X	X

- 9 2 RS232C ports
- 10 Micro input, line input/line output
- 11 DVI port - RGB connection with adaptor (**HMIYADDVIRGB11**) (3)
- 12 2 Ethernet 10/100/1000 Mbps ports
- 13 4 USB 3.0 ports (1 A max.)
- 14 Slots expansion module (Panel PC **HMIPP●6A2701**)
- 15 Slot for half size PCI Express® 1.0 8x 2 Gbps
- 16 Slot for half size PCI 2.2 32-bit

Side panel

- 17 4 status and power supply LEDs
- 18 2 pushbuttons: 1 for power supply and 1 for resetting
- 19 User access to the 2x DDR3 RAM slots which is expandable up to 16 GB and the Slide-in compact slot for storage drive:
 - With 4 GB RAM in 1 slot + Hard Disk ≥ 500 GB (Panel PC **HMIPPF6A2701**)
 - With 4 GB RAM in 1 slot + Flash disk SSD ≥ 60 GB (Panel PC **HMIPPH6A2701**)
- 20 Slot for CFAST card:
 - Free slot (Panel PC **HMIPP●6●2●●●1**)
- 21 Slots expansion module (Panel PC **HMIPP●6A2701**)
- 22 Slide-in slot with the DVD-RW drive included (4). Can be used for an additional storage disk with adaptor (**HMIYADSLIDEIN61**) (3)
- 23 User access to fan (Panel PC **HMIP●H6●●●●●**) (5) or natural convection (Panel PC **HMIP●C6●●●●●** and **HMIP●F6●●●●●**)

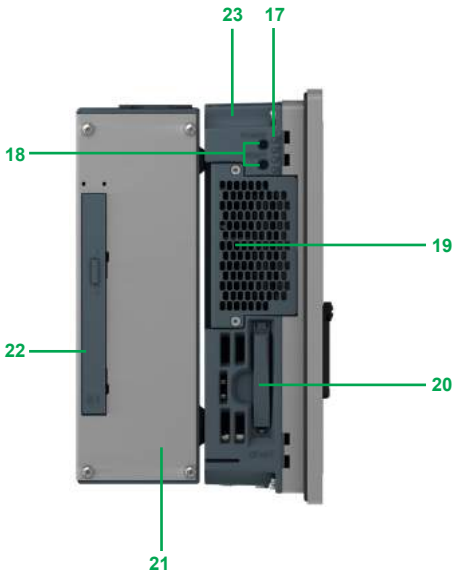

(1) For installation, please refer to the "user manual" on our website www.schneider-electric.com.

(2) Consumption excluding additional PCI/PCI Express® card.

(3) To be ordered separately as an accessory (see pages 2/26 and 2/27).

(4) Operating temperature details available on our website www.schneider-electric.com.

(5) User can add or replace fan, with fan kit **HMIYPFKT061** (to be ordered separately, see page 2/26).

(6) SRAM interface modules must be installed to run Vijeo Designer Run Time.

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ Panel PC

Universal and Performance ranges with 12" touch screen



HMIPUC6D0E01
(Screen side)

Magelis Universal Panel PC - 12" LCD TFT LED touch screen (1) (2)
Intel iCore 3rd generation 827E low power

Supply voltage (6) PCI slot	Operating system	Software	Storage	DDR3 RAM (3)	Reference	Weight kg/lb
--------------------------------	------------------	----------	---------	--------------	-----------	--------------

For maintenance-free environment

24 V --- No PCI slot	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	CFAST card ≥ 4 GB (SLC technology)	2 GB in 1 slot	HMIPUC6D0E01	4.000/ 8.818
-------------------------	-------------------------------------	----------------------------	------------------------------------	----------------	--------------	-----------------

240 V ~ No PCI slot	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	CFAST card ≥ 4 GB (SLC technology)	2 GB in 1 slot	HMIPUC6A0E01	4.000/ 8.818
------------------------	-------------------------------------	----------------------------	------------------------------------	----------------	--------------	-----------------



HMIPUC6D0E01
CPU side

24 V --- No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (5)	Flash disk SSD ≥ 60 GB	2 GB in 1 slot	HMIPUF6D0701	4.000/ 8.818
-------------------------	----------------------------	----------------------------	------------------------	----------------	--------------	-----------------

240 V ~ No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (5)	Flash disk SSD ≥ 60 GB	2 GB in 1 slot	HMIPUF6A0701	4.000/ 8.818
------------------------	----------------------------	----------------------------	------------------------	----------------	--------------	-----------------

For standard industrial environment

24 V --- No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (5)	Hard disk enterprise 24/7 ≥ 500 GB	2 GB in 1 slot	HMIPUH6D0701	4.000/ 8.818
-------------------------	----------------------------	----------------------------	------------------------------------	----------------	--------------	-----------------

24 V ~ No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (5)	Hard disk enterprise 24/7 ≥ 500 GB	2 GB in 1 slot	HMIPUH6A0701	4.000/ 8.818
-----------------------	----------------------------	----------------------------	------------------------------------	----------------	--------------	-----------------



HMIPPF6A2701
(Screen side)

Magelis Performance Panel - 12" LCD TFT LED touch screen (1) (2)
Intel i3 iCore 3rd generation 3217UE dual core low power

Supply voltage (6) PCI slot	Operating system	Software	Storage	DDR3 RAM (3)	Reference	Weight kg/lb
--------------------------------	------------------	----------	---------	--------------	-----------	--------------

For maintenance-free environment

240 V ~ 2 PCI/ PCI Express® slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (5)	Flash disk SSD ≥ 60 GB	4 GB in 1 slot	HMIPPF6A2701	4.200/ 9.259
-------------------------------------	----------------------------	----------------------------	------------------------	----------------	--------------	-----------------

For standard industrial environment

240 V ~ 2 PCI/ PCI Express® slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (5)	Hard disk enterprise 24/7 ≥ 500 GB	4 GB in 1 slot	HMIPPH6A2701	4.200/ 9.259
-------------------------------------	----------------------------	----------------------------	------------------------------------	----------------	--------------	-----------------



HMIPPF6A2701
CPU side

(1) 12" touch screen: XGA 1024 x 768, 16 million colors, IP 65 and Nema 4X indoor front panel protection when mounted on panel or an enclosure door.

(2) For separate components and software, see page 2/27.

(3) Memory capacity user-expandable up to 16 GB in 2 slots.

(4) Windows® Embedded Standard 2009 supplied in 9 languages (English, French, German, Italian, Portuguese, Spanish, Swedish, Chinese, Russian). Also includes:

- Acrobat Reader, Word/Excel/Power Point Viewer
- Framework.Net 3.5
- Web browser
- Vijeo Citect Web Client
- Vijeo Designer Run Time Demo (5)

(5) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC) + requires additional SRAM interface HMIYPINSRAM61, see page 2/26.

(6) AC models come with removable AC to DC power module and the user can also mount additional AC power module HMIYPMAC61 in DC models, see page 2/26.

Industrial PCs

Magelis™ iPCs certified for automation
Magelis™ Panel PC
Universal and Performance ranges with 15" touch screen

Type	Universal range - 15" touch screen (no PCI slot)	
Industrial environments	Maintenance-free (with Aluminium bezel)	Standard (with Aluminium bezel)



Fanless	★★★★★	★★★★★	★★★★★
Non rotative storage drive	★★★★★	★★★★★	—
Screen	15" LCD TFT LED touch screen		
Type	XGA 1024 x 768, 16 million colors		
Definition	IP 65 and Nema 4x indoor front panel protection when mounted on panel or enclosure door		
Degree of protection	Aluminium		
Front panel bezel material	—		
CPU (1)	Intel® ATOM™ N270 (1.6 GHz)		
Processor	—		
PCI slot	—		
Storage	Compact Flash card ≥ 4 GB (SLC technology)	Flash disk SSD ≥ 60 GB	Hard disk enterprise 24/7 ≥ 500 GB
RAM (2)	1 GB	HMIPUF70P01: 1 GB HMIPUF7D0PL1: 2 GB	1 GB
Integrated DVD-RW drive	—		
Slide-in rack for peripheral device	1x slide-in compact rack for storage disk		
Integrated ports	2x Ethernet 10/100/1000 Mbps 1x USB 2.0 (1 A) on the front panel + 4 x USB 2.0 (0.5 and 1 A) at the top 2x RS232C/1x DVI (VGA RGB adaptor, optional)		
Optional ports	1x RS232C/RS422/RS485 (option only available in made-to-order configuration) (1)		
Optional RAID PCI card	—		
Operating system	Windows® Embedded Standard 2009 Windows® XP Professional SP3		
Overall dimensions (W x H x D)/Cut-out (W x H)	402 x 301 x 104 mm/Cut-out: 383.5 x 282.5 mm		
Temperature	During operation 0...50 °C, conforming to IEC 61132-2, UL 508		
Vibration resistance	Continuous 1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (conforming to IEC 60068-2-6 Fc) 0.125 g from 5...100 Hz		
during operation	Non-continuous 3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (conforming to IEC 60068-2-6 Fc) 0.250 g from 5...100 Hz		—
Merchant navy IACS E10	1 mm amplitude from 3...13.2 Hz, 0.7 g from 13.2...100 Hz, 90 minutes endurance		—
Shock resistance	During operation 15 g/11 ms conforming to IEC 60068-2-27 test Ea		
Standards and certifications	CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST		
Marine certif.	Germanischer Lloyd (Bridge Class)		
ATEX certification	—		
Software	Vijeo Designer Run Time Demo 21-day trial version. Unlimited license, to be ordered separately (VJDSNRTMPC)		
References of Aluminium bezel versions (1)	24 V ~	HMIPUC7D0E01	HMIPUF7D0P01
	24 V ~ Vijeo Citect Lite 1200 I/O	—	HMIPUF7D0PL1
	24 V ~ Interface for battery	—	—
	24 V ~ Vijeo Citect Full 500 I/O	—	—
	100...240 V ~	—	—
	100...240 V ~ Vijeo Citect Full 500 I/O	—	HMIPUF7A0P01
	—	—	—
	—	—	—
	—	—	—
References of Stainless steel bezel versions (1)	24 V ~	—	—
	100...240 V ~	—	—
Pages	2/22		
Made-to-order configuration	See configured Magelis Panel PC on page 2/29		

(1) Other options available (interface for backup battery, 3rd serial port, etc.) in made-to-order configuration (see page 2/26).
(2) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 2/26).

Universal range (2 PCI slots)		Performance range (no PCI slot)		Performance range (2 PCI slots)	
Maintenance-free (with Aluminium or Stainless steel bezel)	Standard (with Aluminium or Stainless steel bezel)	Harsh (with Aluminium bezel)	Standard (with Aluminium bezel)	Harsh (with Aluminium bezel)	Standard (with Aluminium or Stainless steel bezel)



★★★★★	★★★★★	—	—	—	—
★★★★★	—	★★★★★	—	★★★★★	—
15" LCD TFT LED touch screen					
XGA 1024 x 768, 16 million colors					
IP 65 and Nema 4X indoor front panel protection when mounted on panel or enclosure door					
Aluminium or Stainless steel		Aluminium		Aluminium or Stainless steel	
Intel® ATOM™ N270 (1.6 GHz)		Intel® Core™ 2 Duo P8400 (2.26 GHz) + Intel® GM45 chipset			
2 (1 PCI + 1 PCI Express®)		—		2 (1 PCI + 1 PCI Express®)	
Flash disk SSD ≥ 60 GB		Hard disk enterprise 24/7 ≥ 500 GB		Flash disk SSD ≥ 60 GB Hard disk enterprise 24/7 ≥ 500 GB	
HMIPUF7A2P01: 1 GB HMIPUF7A2PF1: 2 GB		1 GB		HMIPPF7D0701: 2 GB HMIPPF7D07F1: 4 GB	
1		—		1	
1x slide-in compact rack for storage disk (Flash disk or Hard disk included)		1x slide-in compact rack for storage disk		1x slide-in compact rack for storage disk (Flash disk or Hard disk included)	
1x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)		—		1x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)	
2x Ethernet 10/100/1000 Mbps					
1x USB 2.0 (1 A) on the front panel (only for aluminium bezel version) + 4 x USB 2.0 (0.5 and 1 A) at the top (for all models)					
2x RS232C/1 x DVI (VGA RGB adaptor, optional)					
1x RS232C/RS422/RS485 (option only available in made-to-order configuration) (1)					
HMIYRAIDPCI11 RAID PCI card with 2 redundant hard disks (see page 2/27)		—		HMIYRAIDPCI11 RAID PCI card with 2 redundant hard disks (see page 2/27)	
Windows® XP Professional SP3		Windows® 7 Ultimate 64-bit			
402 x 301 x 153 mm/Cut-out: 383.5 x 282.5 mm		402 x 301 x 119 mm/Cut-out: 383.5 x 282.5 mm		402 x 301 x 168 mm/Cut-out: 383.5 x 282.5 mm	
0...50 °C, conforming to IEC 61132-2, UL 508					
1.75 mm from 2...9 Hz, 0.5 g from 9...200 Hz (3)		0.125 g from 5...100 Hz		1.75 mm from 2...9 Hz, 0.5 g from 9...200 Hz (3)	
3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (3)		0.250 g from 5...100 Hz		3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (3)	
—					
15 g/11 ms conforming to IEC 60068-2-27 test Ea					
□ CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST					
□ EN 1672-2 Food and beverage processing machines and FDA 21CFR 177.206 specific seals (Stainless steel bezel versions only)					
—					
ATEX II 3 Dust zone 22 (Stainless steel bezel versions only)					
21-day trial version. Unlimited license, to be ordered separately (VJDSNRTMPC)					
—	HMIPUH7D2P01	HMIPPF7D0701	HMIPPH7D0701	—	HMIPPH7D2701
—	—	—	—	—	—
—	—	—	—	—	HMIPPH7B2701
—	—	HMIPPF7D07F1	—	—	—
HMIPUF7A2P01	HMIPUH7A2P01	—	HMIPPH7A0701	HMIPPF7A2701	HMIPPH7A2701
HMIPUF7A2PF1	—	—	—	HMIPPF7A27F1	—
HMIPUF7D2P01	HMIPUH7D2P01	—	—	—	—
—	—	—	—	—	HMIPRH7A2701
2/22		2/23			
See configured Magelis Panel PC on page 2/29					

(3) Conforming to IEC 60068-2-6 Fc.

Industrial PCs

Magelis™ iPCs certified for automation
Magelis™ Panel PC
Universal and Performance ranges with 19" touch screen

Type	Universal range - 19" touch screen (no PCI slot)	
Industrial environments	Maintenance-free (with Aluminium bezel)	Standard (with Aluminium bezel)



Fanless	★★★★★	★★★★★	★★★★★
Non-rotative storage drive	★★★★★	★★★★★	–
Screen	19" LCD TFT LED touch screen		
Type	SXGA 1280 x 1024, 16 million colors		
Resolution	IP 65 and Nema 4x indoor front panel protection when mounted on panel or enclosure door		
Degree of protection	Aluminum		
Front panel bezel material	Intel® ATOM™ N270 (1.6 GHz)		
CPU (1)	–		
Processor	Compact Flash card ≥ 4 GB (SLC technology)		
PCI slot	Flash disk SSD ≥ 60 GB	Flash disk SSD ≥ 60 GB	Hard disk enterprise 24/7 ≥ 500 GB
Storage	1 GB	HMIPUF9D0P01: 1 GB HMIPUF9D0PF1: 2 GB	1 GB
RAM (2)	–		
Integrated DVD-RW drive	1x slide-in compact rack for storage disk		
Slide-in rack for peripheral device	2x Ethernet 10/100/1000 Mbps		
Integrated ports	1x USB 2.0 (1 A) on the front panel + 4x USB 2.0 (0.5 and 1 A) at the top		
Optional ports (1)	2x RS232C/1x DVI (VGA RGB adaptor, optional)		
Optional RAID PCI card	1x RS232C/RS422/RS485 (option only available in made-to-order configuration) (1)		
Operating system	Windows® Embedded Standard 2009	Windows® XP Professional SP3	
Overall dimensions (W x H x D)/Cut-out (W x H)	480 x 380 x 114 mm/Cut-out: 459.5 x 359.5 mm		
Temperature	During operation		
Vibration resistance	Continuous		
during operation	1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (3)		0.125 g from 5...100 Hz
Merchant navy IACS E10	3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (3)		0.250 g from 5...100 Hz
Shock resistance	During operation		
Standards and certifications	1 mm amplitude from 3...13.2 Hz, 0.7 g from 13.2...100 Hz, 90 minutes endurance		
Marine certification	15 g/11 ms conforming to IEC 60068-2-27 test Ea		
Software	Germanischer Lloyd (Bridge Class)		
References (1)	24 V ~ only with additional power supply filter HMIYLFIMAR11 –		
Pages	21-day trial version. Unlimited license, to be ordered separately (VJDSNRTMPC)		
Made-to-order configuration	See configured Magelis Panel PC on page 2/29		
	HMIPUC9D0E01	HMIPUF9D0P01	HMIPUH9D0P01
	–	–	–
	–	HMIPUF9D0PF1	–
	–	–	HMIPUH9A0P01
	–	–	–

(1) Other options available (interface for backup battery, 3rd serial port, etc.) in made-to-order configuration (see page 2/26).
(2) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 2/26).

Universal range - 19" touch screen (2 PCI slots)		Performance range - 19" touch screen (no PCI slot)		Performance range - 19" touch screen (2 PCI slots)	
Maintenance-free (with Aluminium bezel)	Standard (with Aluminium bezel)	Harsh (with Aluminium bezel)	Standard (with Aluminium bezel)	Harsh (with Aluminium bezel)	Standard (with Aluminium bezel)



★★★★★	★★★★★	–	–	–	–
★★★★★	–	★★★★★	–	★★★★★	–
19" LCD TFT LED touch screen					
SXGA 1280 x 1024, 16 million colors					
IP 65 and Nema 4X indoor front panel protection when mounted on panel or enclosure door					
Aluminum					
Intel® ATOM™ N270 (1.6 GHz)			Intel® Core™ 2 Duo P8400 (2.26 GHz) + Intel® GM45 chipset		
2 (1 PCI + 1 PCI Express®)			2 (1 PCI + 1 PCI Express®)		
Flash disk SSD ≥ 60 GB		Hard disk enterprise 24/7 ≥ 500 GB		Flash disk SSD ≥ 60 GB	
HMIPUF9A2P01: 1 GB HMIPUF9A2PF1: 2 GB		1 GB		Flash disk SSD ≥ 60 GB	
–		–		Hard disk enterprise 24/7 ≥ 500 GB	
–		–		2 GB	
–		–		2 GB	
–		–		HMIPPF9A2701: 2 GB HMIPPF9A27F1: 4 GB	
–		–		2 GB	
1		–		1	
1x slide-in compact rack for storage disk (Flash disk or Hard disk included)		1x slide-in compact rack for storage disk		1x slide-in compact rack for storage disk (Flash disk or Hard disk included)	
1x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)		1x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)		1x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)	
2x Ethernet 10/100/1000 Mbps		2x Ethernet 10/100/1000 Mbps		2x Ethernet 10/100/1000 Mbps	
1x USB 2.0 (1 A) on the front panel + 4 x USB 2.0 (0.5 and 1 A) at the top		1x USB 2.0 (1 A) on the front panel + 4 x USB 2.0 (0.5 and 1 A) at the top		1x USB 2.0 (1 A) on the front panel + 4 x USB 2.0 (0.5 and 1 A) at the top	
2x RS232C/1 x DVI (VGA RGB adaptor, optional)		2x RS232C/1 x DVI (VGA RGB adaptor, optional)		2x RS232C/1 x DVI (VGA RGB adaptor, optional)	
1x RS232C/RS422/RS485 (option only available in made-to-order configuration) (1)		1x RS232C/RS422/RS485 (option only available in made-to-order configuration) (1)		1x RS232C/RS422/RS485 (option only available in made-to-order configuration) (1)	
HMIYRAIDPCI11 RAID PCI card with 2 redundant hard disks (see page 2/27)		–		HMIYRAIDPCI11 RAID PCI card with 2 redundant hard disks (see page 2/27)	
Windows® XP Professional SP3		Windows® XP Professional SP3		Windows® 7 Ultimate 64-bit	
480 x 380 x 153 mm/Cut-out: 459.5 x 359.5 mm		480 x 380 x 129 mm/Cut-out: 459.5 x 359.5 mm		480 x 380 x 168 mm/Cut-out: 459.5 x 359.5 mm	
0...50 °C, conforming to IEC 61132-2, UL 508					
1.75 mm from 2...9 Hz, 0.5 g from 9...200 Hz (3)		0.125 g from 5...100 Hz		1.75 mm from 2...9 Hz, 0.5 g from 9...200 Hz (3)	
3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (3)		0.250 g from 5...100 Hz		0.125 g from 5...100 Hz	
–		–		1.75 mm from 2...9 Hz, 0.5 g from 9...200 Hz (3)	
–		–		0.250 g from 5...100 Hz	
–		–		0.250 g from 5...100 Hz	
–		–		3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (3)	
–		–		0.250 g from 5...100 Hz	
–		–		0.250 g from 5...100 Hz	
–		–		3.5 mm from 2...9 Hz, 1 g from 9...200 Hz (3)	
–		–		0.250 g from 5...100 Hz	
–		–		0.250 g from 5...100 Hz	
15 g/11 ms conforming to IEC 60068-2-27 test Ea					
CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), C-Tick, GOST					
–					
21-day trial version. Unlimited license, to be ordered separately (VJDSNRTMPC)					
–	HMIPUH9D2P01	HMIPPF9D0701	HMIPPH9D0701	–	HMIPPH9D2701
–	–	–	–	–	–
–	–	HMIPPF9D07F1	–	–	–
HMIPUF9A2P01	HMIPUH9A2P01	–	HMIPPH9A0701	HMIPPF9A2701	HMIPPH9A2701
HMIPUF9A2PF1	–	–	–	HMIPPF9A27F1	–
2/24	2/25		–		
See configured Magelis Panel PC on page 2/29					

(3) Conforming to IEC 60068-2-6 Fc.

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ Panel PC

Universal and Performance ranges with 15" or 19" touch screen

2



Magelis Panel PC 15" and 19"

Presentation

The Magelis Panel PC Universal and Performance ranges with 15" and 19" touch screens offer products that are rugged and certified for automation applications.

Both ranges are suitable for various uses in the following environments:

- Maintenance-free
- Harsh
- Standard

The 15" screen Magelis Panel PC version with a stainless steel front panel bezel and ATEX certification are particularly recommended for certain targeted sectors like food and beverage, chemical, pharmaceutical, and gas and petroleum.

The 15" and 19" touch screens are LCD TFT LED 16 million color touch screen with IP 65 front panel protection when mounted on a panel or an enclosure door.

The modular design of the Panel PCs provide a complete and coherent offer of referenced products with the Universal and Performance ranges.

In addition to the referenced offer, the flexibility offered by the modular design allows Magelis Panel PCs to be made-to-order (see page 2/27).

Overview of the range

Magelis Panel PC Universal range with 15" and 19" touch screens (1) (2)

The Magelis Universal Panel PC with 15" and 19" touch screens are equipped with a fanless Intel® ATOM™ N270 processor (1.6 GHz) and DDR2 RAM (3).

This range is designed for the following environments:

- Maintenance-free (fanless, with solid-state storage disk):
 - **HMIPUC7D0E01** and **HMIPUC9D0E01**:
 - No PCI slot
 - Compact Flash card/Windows® Embedded Standard 2009
 - 24 V $\overline{\text{DC}}$ power supply
 - **HMIPUF7D0P01**, **HMIPUF7D0PL1**, **HMIPUF7A0P01**, **HMIPUF9D0P01** and **HMIPUF9D0PF1**:
 - No PCI slot
 - Flash disk SSD/Windows® XP Professional SP3
 - 24 V $\overline{\text{DC}}$ or 100...240 V \sim power supply
 - **HMIPUF7A2P01**, **HMIPUF7A2PF1**, **HMIPUF9A2P01** and **HMIPUF9A2PF1**:
 - 1 PCI + 1 PCI Express®,
 - Flash disk SSD/Windows® XP Professional SP3
 - 100...240 V \sim power supply
- Maintenance-free (fanless, with solid-state storage disk) and with Stainless steel front panel bezel:
 - **HMIPTF7D2P01**:
 - 1 PCI + 1 PCI Express®
 - Flash disk SSD/Windows® XP Professional SP3
 - 24 V $\overline{\text{DC}}$ power supply
- Standard industrial environments (with Hard disk):
 - **HMIPUH7D0P01**, **HMIPUH7A0P01**, **HMIPUH9D0P01** and **HMIPUH9A0P01**:
 - No PCI slot
 - Hard disk/Windows® XP Professional SP3
 - 24 V $\overline{\text{DC}}$ or 100...240 V \sim power supply
 - **HMIPUH7D2P01**, **HMIPUH7A2P01**, **HMIPUH9D2P01** and **HMIPUH9A2P01**:
 - 1 PCI + 1 PCI Express®,
 - Hard disk/Windows® XP Professional SP3
 - 24 V $\overline{\text{DC}}$ or 100...240 V \sim power supply
- Standard industrial environments (with Hard disk) and with Stainless steel front panel bezel:
 - **HMIPTH7D2P01**:
 - 1 PCI + 1 PCI Express®,
 - Flash disk SSD/Windows® XP Professional SP3
 - 24 V $\overline{\text{DC}}$ power supply

(1) Types of PCI slot: Half-format PCI 2.2 and half-format PCI Express® 4x.

(2) For description, see pages 2/20 and 2/21.

(3) Not user-expandable; increased capacity available in made-to-order configuration (see page 2/27).

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ Panel PC

Universal and Performance ranges with
15" or 19" touch screen

Presentation (continued)

Overview of the range (continued)

Magelis Panel PC Performance range (1) (2)

The Magelis Panel PC Performance range is equipped with the Intel® Core™ 2 Duo P8400 processor (2.26 GHz) + Intel® GM45 chipset and DDR3 RAM (3).

This range is designed for the following environments:

- Harsh industrial environments (with solid-state storage disk):
 - **HMIPPF7D0701, HMIPPF7D07F1, HMIPPF9D0701 and HMIPPF9D07F1:**
 - No PCI slot
 - Flash disk SSD/Windows® 7 Ultimate 64-bit
 - 24 V $\overline{\text{---}}$ power supply
 - **HMIPPF7A2701, HMIPPF7A27F1, HMIPPF9A2701 and HMIPPF9A27F1:**
 - 1 PCI + 1 PCI Express®
 - Flash disk SSD/Windows® 7 Ultimate 64-bit
 - 100...240 V \sim power supply
- Standard industrial environments (with Hard disk):
 - **HMIPPH7D0701, HMIPPH7A0701, HMIPPH9D0701 and HMIPPH9A0701:**
 - No PCI slot
 - Hard disk/Windows® 7 Ultimate 64-bit
 - 24 V $\overline{\text{---}}$ or 100...240 V \sim power supply
 - **HMIPPH7D2701, HMIPPH7B2701 (4), HMIPPH7A2701, HMIPPH9D2701 and HMIPPH9A2701:**
 - 1 PCI + 1 PCI Express®
 - Hard disk/Windows® 7 Ultimate 64-bit
 - 24 V $\overline{\text{---}}$ or 100...240 V \sim power supply
- Standard industrial environments (with Hard disk) and with Stainless steel front panel bezel:
 - **HMIPRH7A2701:**
 - 1 PCI + PCI Express®
 - Hard disk/Windows® 7 Ultimate 64-bit
 - 100...240 V \sim power supply

Made-to-order Magelis Panel PC Universal and Performance ranges

On Magelis Universal and Performance Panel PC bases, it is possible to customize the CPU by selecting:

- The capacity of the Compact Flash card and the RAM
- The number of PCI and PCI Express® slots
- The operating system and dedicated HMI software
- Additional assembled options: PCI RAID card with 2 redundant Hard disks (5), interface for backup battery, interface for battery-backed power supply module, third RS 485 port, etc.

For more information on HMIPCC offer, see page 2/29.

USB accessories for HMI terminals

The Magelis™ USB accessories are designed to expand selection range of user applications by offering value-added/differentiated HMI solutions. These innovative USB accessories can be easily installed and operated with HMI terminals (6).

The Magelis USB accessories supported by Magelis Panel PC includes:

- Harmony XB5S biometric USB switch
- Magelis HMIZ illuminated USB switch

For more information on HMI USB accessories, please refer to our website www.schneider-electric.com.

(1) Types of PCI slot: Half-format PCI 2.2 and half-format PCI Express® 4x.

(2) For description, see pages 2/20 and 2/21.

(3) Not user-expandable; increased capacity available in made-to-order configuration (see page 2/27).

(4) Supplied with battery-backed interface module inserted.

(5) Operating temperature details available on our website www.schneider-electric.com.

(6) Requires Vijeo Designer software running on Magelis Panel PC.

Description


Industrial PCs

Magelis™ iPCs certified for automation


Magelis™ Panel PC

Universal and Performance ranges with
15" or 19" touch screen


2

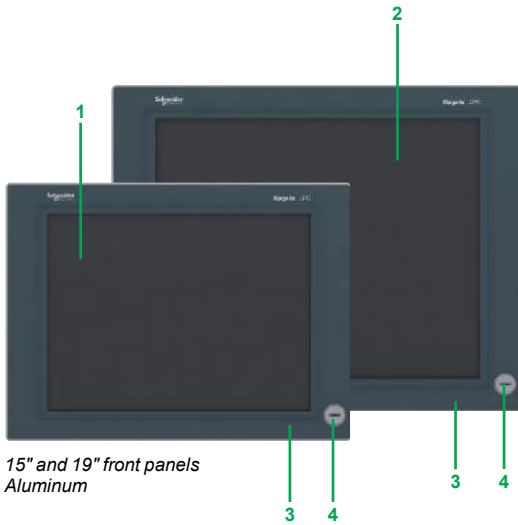


15" and 19" front panels
Aluminium

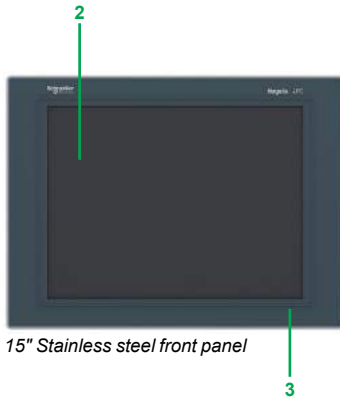

15" Stainless steel front panel



Rear panel



Underside

Magelis Panel PC, 15" or 19"

Description

Magelis Universal and Performance Panel PC:

15" (Aluminium and Stainless steel bezel) and 19" (Aluminium bezel)

Front panels

1 15" LCD TFT LED touch screen, XGA 1024 x 768, 16 million colors for **HMIP●●7●●●●●●**:

- Brightness: 350 cd/m² (adjustable)
- Type of touch panel: Analog resistive film, resolution 4096 x 4096
- Typical viewing angle: 100° (vertically)/160° (horizontally)

2 19" LCD TFT LED touch screen, SXGA 1280 x 1024, 16 million colors for **HMIP●●9●●●●●●**:

- Brightness: 300 cd/m² (adjustable)
- Type of touch panel: Analog resistive film, resolution 4096 x 4096
- Typical viewing angle: 100° (vertically)/160° (horizontally)

3 Aluminum alloy front panel providing IP 65 and Nema 4X indoor front panel protection when mounted on a panel or an enclosure door; mounted on 1.6...10 mm thick support using screw fasteners supplied (1)

or

Stainless steel 304 "Scotch Brite®" brushed finish front panel enabling an IP 65 and Nema 4X indoor degree of protection of the front panel when mounted on a panel or an enclosure door. Mounted on 1.6...10 mm thick support using stainless steel screw fasteners supplied (1). Simplified cleaning because of the absence of USB port on front panel (conforms to food and beverage processing machines standard EN 1672-2). Version fitted with specific seals (standard FDA 21 CFR 177.206)

4 USB 2.0 port (1 A max.) with screw-on protective cover (only available for Aluminium version); captive protective cover option also available (2)

Rear panel

5 Heat sink (1)

6 Connector for Panel PC 100...240 V ~/1.6 A power supply (Panel PC **HMI●●●●A●●●●**) (3)

7 On/Off switch for 100...240 V ~ power supply (Panel PC **HMI●●●●A●●●●**)

Underside

8 Fans (Panel PC **HMIPP●●●●●●●●**) (4)


Natural convection (Panel PC **HMIPU●●●●●●●●**) (1)

(1) For installation, please refer to the "product data sheet" on our website www.schneider-electric.com.


(2) To be ordered separately (see page 2/26).

(3) Consumption excluding additional PCI card.

(4) Can be replaced with the Panel PC fan kit by the customer (to be ordered separately, see page 2/26).




Side panel




Top panel

Magelis Panel PC, 15" or 19", no PCI slot



Side panel



Top panel

Magelis Panel PC, 15" or 19", 2 PCI slots

Description (continued)

Magelis Universal and Performance Panel PC, 15" and 19", no PCI slot

Side panel

- 1 4 status and power supply LEDs
- 2 2 pushbuttons: 1 for power supply and 1 for resetting
- 3 Battery
- 4 Slot for Compact Flash card:
 - With Compact Flash card (SLC technology) ≥ 4 GB (Panel PC **HMIPUC•D0E01**)
 - Free slot (Panel PC **HMIP•F•0•0•1**, **HMIP•H•0•0•1**)
- 5 Slide-in compact rack:
 - Free slot (Panel PC **HMIPUC•D0E01**)
 - With Flash disk SSD ≥ 60 GB (Panel PC **HMIP•F•0•0•1**)
 - With Hard disk ≥ 500 GB (Panel PC **HMIP•H•0•0•1**)

Top panel

- 6 Free slot for battery-backed power supply interface module (1)
- 7 Micro input, line input/line output
- 8 Connector for Panel PC 24 V $\overline{\text{---}}$ /7 A power supply (Panel PC **HMIP••••D0••1**) (2)
- 9 2 RS232C ports
- 10 DVI port - RGB connection with adaptor (**HMIYADDVIRGB11**) (1)
- 11 2 Ethernet 10/100/1000 Mbps ports
- 12 2 USB 2.0 ports (1 A max.)
- 13 2 USB 2.0 ports (0.5 A max.)
- 14 Slot for additional RS232C/RS422/RS485 serial link interface; to be ordered separately in made-to-order configuration (1).

Magelis Universal and Performance Panel PC, 15" and 19", 2 PCI slots

Side panel

- 1 4 status and power supply LEDs
- 2 2 pushbuttons: 1 for power supply and 1 for resetting
- 3 Battery
- 4 Free slot for Compact Flash card
- 5 Slide-in compact rack:
 - With Flash disk SSD ≥ 60 GB (Panel PC **HMIP•F•••••1**)
 - With Hard disk ≥ 500 GB (Panel PC **HMIP•H•••2••1**)
- 6 Slide-in rack with the DVD-RW drive included (3). Can be used for an additional storage disk with adaptor (**HMIYADSLIDEIN11**) (4)

Top panel

- 7 Slot for battery-backed power supply interface module:
 - Module mounted on Panel PC **HMIPPH7B2701**
 - Module not included as standard on other models (1)
- 8 Micro input, line input/line output
- 9 Connector for Panel PC 24 V $\overline{\text{---}}$ /7 A power supply (Panel PC **HMIP•D•••••1**) (2)
- 10 2 RS232C ports
- 11 DVI port - RGB connection with adaptor (**HMIYADDVIRGB11**) (1)
- 12 2 Ethernet 10/100/1000 Mbps ports
- 13 2 USB 2.0 ports (1 A max.)
- 14 2 USB 2.0 ports (0.5 A max.)
- 15 Half-format PCI Express® 4x slot
- 16 Half-format PCI 2.2 slot
- 17 Slot for additional RS232C/RS422/RS485 serial link interface; to be ordered separately in made-to-order configuration (1).

(1) To be ordered separately in made-to-order configuration (see page 2/27).

(2) Consumption excluding additional PCI card.

(3) Operating temperature details available on our website www.schneider-electric.com.

(4) To be ordered separately as an accessory (see page 2/26).

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ Panel PC

Universal range - 15" touch screen

2



HMIPU70001
(Screen side)



HMIPTF7D2P01
HMIPTH7D2P01
(Screen side)



HMIPU7A0P01
(CPU side)



HMIPU7A2P01
(CPU side)



HMIPUH7D2P01
(CPU side)

Magelis Universal Panel PC - 15" LCD TFT LED touch screen (1) (2) (Intel® ATOM™ N270 processor (1.6 GHz)/DDR2 RAM)

Supply voltage PCI slot	Operating system	Software	Storage	DDR2 RAM (3)	Reference	Weight kg/lb	
For maintenance-free environment (with Aluminium front panel bezel)							
24 V ~ No PCI slot	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	Compact Flash (SLC technology) ≥ 4 GB	1 GB	HMIPUC7D0E01	8.900/ 19.621	
		Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk SSD ≥ 60 GB	1 GB	HMIPUF7D0P01	9.000/ 19.842
		Vijeo Designer RT Demo (5) Vijeo Citect Lite 1200 I/O	Flash disk SSD ≥ 60 GB	2 GB	HMIPUF7D0PL1	9.000/ 19.842	
100...240 V ~ No PCI slot	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk SSD ≥ 60 GB	1 GB	HMIPUF7A0P01	9.500/ 20.943	
		Vijeo Designer RT Demo (5) Vijeo Citect Full 500 I/O	Flash disk SSD ≥ 60 GB	2 GB	HMIPUF7A2P01	10.900/ 24.030	
100...240 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk SSD ≥ 60 GB	1 GB	HMIPUF7A2P01	10.900/ 24.030	
		Vijeo Designer RT Demo (5) Vijeo Citect Full 500 I/O	Flash disk SSD ≥ 60 GB	2 GB	HMIPUF7A2PF1	10.900/ 24.030	

For maintenance-free environment (with Stainless steel front panel bezel)

24 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk SSD ≥ 60 GB	1 GB	HMIPTF7D2P01	11.100/ 24.471
-------------------------------------	---------------------------------	-------------------------------	------------------------	------	--------------	-------------------

For standard industrial environment (with Aluminium front panel bezel)

24 V ~ No PCI slot	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk enterprise 24/7 ≥ 500 GB	1 GB	HMIPUH7D0P01	9.000/ 8.818
24 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk enterprise 24/7 ≥ 500 GB	1 GB	HMIPUH7D2P01	10.300/ 22.708
				1 GB	HMIPUH7A0P01	9.500/ 20.943
100...240 V ~ No PCI slot	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk enterprise 24/7 ≥ 500 GB	1 GB	HMIPUH7A2P01	10.900/ 24.030
				1 GB	HMIPUH7A2P01	10.900/ 24.030

For standard industrial environment (with Stainless steel front panel bezel)

24 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk enterprise 24/7 ≥ 500 GB	1 GB	HMIPUH7D2P01	11.100/ 24.471
-------------------------------------	---------------------------------	-------------------------------	---------------------------------------	------	--------------	-------------------

(1) 15" touch screen: XGA 1024 x 768, 16 million colors, IP 65 and Nema 4X indoor front panel protection when mounted on panel or an enclosure door.
 (2) For separate components, software and external power supply see page 2/26.
 (3) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 2/27).
 (4) Windows® Embedded Standard 2009 supplied in 9 languages (English, French, German, Italian, Portuguese, Spanish, Swedish, Chinese, Russian). Also includes:
 - Acrobat Reader, Word/Excel/Power Point Viewer
 - Framework.Net 3.5
 - Web browser
 - Vijeo Citect Web Client
 - Vijeo Designer Run Time Demo (5)
 (5) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC) (see page 2/28).

Industrial PCs

Magelis™ iPCs certified for automation
Magelis™ Panel PC
Performance range - 15" touch screen

Magelis Performance Panel - 15" LCD TFT LED touch screen (1) (2)
(Intel® Core™ 2 Duo P8400 processor (2.26 GHz)/DDR3 RAM)

Supply voltage PCI slot	Operating system	Software	Storage	DDR3 RAM (3)	Reference	Weight kg/lb
For harsh industrial environment (with Aluminium front panel bezel)						
24 V $\overline{\text{---}}$ No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Flash disk SSD ≥ 60 GB	2 GB	HMIPPF7D0701	10.100/ 22.267
		Vijeo Designer RT Demo (4) Vijeo Citect Full 500 I/O	Flash disk SSD ≥ 60 GB	4 GB	HMIPPF7D07F1	10.100/ 22.267



HMIPP7●●●●●1
(Screen side)



HMIPPF7A2701
(Screen side)



HMIPP7A0701
(CPU side)



HMIPP7A27●1
(CPU side)



HMIPPH7D2701
(CPU side)

100...240 V \sim 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Flash disk SSD ≥ 60 GB	2 GB	HMIPPF7A2701	12.000/ 26.455
		Vijeo Designer RT Demo (4) Vijeo Citect Full 500 I/O	Flash disk SSD ≥ 60 GB	4 GB	HMIPPF7A27F1	12.000/ 26.455

For standard industrial environment (with Aluminium front panel bezel)

24 V $\overline{\text{---}}$ No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk enterprise 24/7 ≥ 500 GB	2 GB	HMIPPH7D0701	10.100/ 22.267
---	-------------------------------	-------------------------------	---------------------------------------	------	---------------------	-------------------

24 V $\overline{\text{---}}$ 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk enterprise 24/7 ≥ 500 GB	2 GB	HMIPPH7D2701	11.400/ 25.133
--	-------------------------------	-------------------------------	---------------------------------------	------	---------------------	-------------------

24 V $\overline{\text{---}}$ with interface for backup battery 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk enterprise 24/7 ≥ 500 GB	2 GB	HMIPPH7B2701	11.400/ 25.133
---	-------------------------------	-------------------------------	---------------------------------------	------	---------------------	-------------------

100...240 V \sim No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk enterprise 24/7 ≥ 500 GB	2 GB	HMIPPH7A0701	10.600/ 23.368
---	-------------------------------	-------------------------------	---------------------------------------	------	---------------------	-------------------

100...240 V \sim 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk enterprise 24/7 ≥ 500 GB	2 GB	HMIPPH7A2701	12.000/ 26.455
--	-------------------------------	-------------------------------	---------------------------------------	------	---------------------	-------------------

For standard industrial environment (with Stainless steel front panel bezel)

100...240 V \sim 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (4)	Hard disk enterprise 24/7 ≥ 500 GB	2 GB	HMIPRH7A2701	12.200/ 26.896
--	-------------------------------	-------------------------------	---------------------------------------	------	---------------------	-------------------

(1) 15" touch screen: XGA 1024 x 768, 16 million colors, IP 65 and Nema 4X indoor front panel protection when mounted on panel or an enclosure door.

(2) For separate components, software and external power supply see page 2/26.

(3) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 2/27).

(4) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTPMC) (see page 2/28).

Industrial PCs

Magelis™ iPCs certified for automation
 Magelis™ Panel PC
 Universal range - 19" touch screen

2



HMIPU●9●●●●1
(Screen side)



HMIPU●9A2P●1
(CPU side)



HMIPUH9D2P01
(CPU side)



HMIPUH9A0P01
(CPU side)

Magelis Universal Panel PC - 19" LCD TFT LED touch screen (1) (2)						
(Intel® ATOM™ N270 processor (1.6 GHz)/DDR2 RAM)						
Supply voltage PCI slot	Operating system	Software	Storage	DDR2 RAM (3)	Reference	Weight kg/lb
For maintenance-free environment (with Aluminium front panel bezel)						
24 V ~ No PCI slot	Windows® Embedded Standard 2009 (4)	Vijeo Designer RT Demo (5)	Compact Flash (SLC technology) ≥ 4 GB	1 GB	HMIPUC9D0E01	13.600/ 29.983
	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk SSD ≥ 60 GB	1 GB	HMIPUF9D0P01	13.700/ 30.203
100...240 V ~ 1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Flash disk SSD ≥ 60 GB	1 GB	HMIPUF9A2P01	14.700/ 32.408
		Vijeo Designer RT Demo (5) Vijeo Citect Full 500 I/O	Flash disk SSD ≥ 60 GB	2 GB	HMIPUF9D0PF1	13.700/ 30.203
For standard industrial environment (with Aluminium front panel bezel)						
24 V ~ No PCI slot	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk enterprise 24/7 ≥ 500 GB	1 GB	HMIPUH9D0P01	13.700/ 30.203
	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk enterprise 24/7 ≥ 500 GB	1 GB	HMIPUH9D2P01	15.000/ 33.069
100...240 V ~ No PCI slot	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk enterprise 24/7 ≥ 500 GB	1 GB	HMIPUH9A0P01	14.300/ 31.526
	Windows® XP Professional SP3	Vijeo Designer RT Demo (5)	Hard disk enterprise 24/7 ≥ 500 GB	1 GB	HMIPUH9A2P01	15.500/ 34.172

(1) 19" touch screen: SXGA 1280 x 1024, 16 million colors, IP 65 and Nema 4X indoor front panel protection when mounted on panel or an enclosure door.

(2) For separate components, software and external power supply see page 2/26.

(3) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 2/27).

(4) Windows® Embedded Standard 2009 supplied in 9 languages (English, French, German, Italian, Portuguese, Spanish, Swedish, Chinese, Russian). Also includes:

- Acrobat Reader, Word/Excel/Power Point Viewer
- Framework.Net 3.5
- Web browser
- Vijeo Citect Web Client
- Vijeo Designer Run Time Demo (5)

(5) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTPMC) (see page 2/28).

Magelis Performance Panel - 19" LCD TFT LED touch screen^{(1) (2)}

(Intel® Core™ 2 Duo P8400 processor (2.26 GHz)/DDR3 RAM)

Supply voltage PCI slot	Operating system	Software	Storage	DDR3 RAM ⁽³⁾	Reference	Weight kg/lb
For harsh industrial environment (with Aluminium front panel bezel)						
24 V $\overline{\text{---}}$ No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo ⁽⁴⁾	Flash disk SSD \geq 60 GB	2 GB	HMIPPF9D0701	14.800/ 32.628
		Vijeo Designer RT Demo ⁽⁴⁾ Vijeo Citect Full 500 I/O	Flash disk SSD \geq 60 GB	4 GB	HMIPPF9D07F1	14.800/ 32.628
100...240 V \sim 1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo ⁽⁴⁾	Flash disk SSD \geq 60 GB	2 GB	HMIPPF9A2701	16.600/ 36.596
		Vijeo Designer RT Demo ⁽⁴⁾ Vijeo Citect Full 500 I/O	Flash disk SSD \geq 60 GB	4 GB	HMIPPF9A27F1	16.600/ 36.596

PF110313



HMIPP9A2701
(Screen side)

PF110326



HMIPP9A2701
(CPU side)

PF110343



HMIPPH9D2701
(CPU side)

PF110342



HMIPPH9A0701
(CPU side)

For standard industrial environment (with Aluminium front panel bezel)

24 V $\overline{\text{---}}$ No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo ⁽⁴⁾	Hard disk enterprise 24/7 \geq 500 GB	2 GB	HMIPPH9D0701	14.800/ 32.628
		Vijeo Designer RT Demo ⁽⁴⁾ Vijeo Citect Full 500 I/O	Hard disk enterprise 24/7 \geq 500 GB	2 GB	HMIPPH9D2701	16.100/ 35.494
100...240 V \sim No PCI slot	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo ⁽⁴⁾	Hard disk enterprise 24/7 \geq 500 GB	2 GB	HMIPPH9A0701	15.400/ 33.951
		Vijeo Designer RT Demo ⁽⁴⁾ Vijeo Citect Full 500 I/O	Hard disk enterprise 24/7 \geq 500 GB	2 GB	HMIPPH9A2701	16.500/ 36.376

(1) 19" touch screen: SXGA 1280 x 1024, 16 million colors, IP 65 and Nema 4X indoor front panel protection when mounted on panel or an enclosure door.

(2) For separate components, software and external power supply, see page 2/26.

(3) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 2/27).

(4) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC), (see page 2/28).

Separate components

Description	Details	Compatible with Magelis Panel PC ranges:			Reference	Weight kg/lb
		Optimum	Universal	Performance		
Hard Disk Drive	500 GB, blank	-	Panel PC 12"		HMIYHDD50061	—
Flash Disk SSD	60 GB, blank	-	Panel PC 12"		HMIYSDD06061	—
	128 GB, blank	-	All models		HMIYSDD18061	—
CFast card (SLC technology)	4 GB, blank	-	Panel PC 12"		HMIYCFA04	—
	8 GB, blank	-	Panel PC 12"		HMIYCFA08	—
	16 GB, blank	-	Panel PC 12"		HMIYCFA16	—
DVD-RW drive for slide-in slot (1)	CD-RW and DVD-RW reader/writer	-	Panel PC 12"		HMIYDRDVDRW61	—
RAM expansion DDR3	2 GB for 1 slot	-	Panel PC 12"		HMIYPRAM302061	—
	4 GB for 1 slot	-	Panel PC 12"		HMIYPRAM304061	—
	8 GB for 1 slot	-	Panel PC 12"		HMIYPRAM308061	—
Interface module	Additional serial link RS232/422/485	-	Panel PC 12"		HMIYPINSL61	—
	SRAM for Vijeo Designer	-	Panel PC 12"		HMIYPINSRAM61	—
	Battery backup interface	-	Panel PC 12"		HMIYPUPSINT61	—
Backup power supply kit	"Provides an uninterruptible power supply. Includes: ■ 1 backup battery ■ 1x 3 m cordset	-	Panel PC 12" (require battery backup interface HMIPUPSINT61)		HMIYUPSKT61	—
Slide-in adaptor for storage disk (2)	To insert a Hard disk, a Flash disk SSD, or a CFast with adaptor, in a slide-in slot	-	Panel PC 12"		HMIYADSLIDEIN61	—
Slide-in compact adaptor for CFast (2)	To insert a CFast in a slide-in compact slot	-	Panel PC 12"		HMIYADCFAST61	—
Slots expansion module	Module 1 PCI + 1 slide-in slots	-	Panel PC 12"		HMIYPCI161	—
	Module 1 PCI Express® + 1 slide-in slots	-	Panel PC 12"		HMIYPCIC61	—
	Module 1 PCI + 1 PCI Express® + 1 slide-in slots	-	Panel PC 12"		HMIYPCI261	—
	Module 2 PCI + 1 slide-in slots	-	Panel PC 12"		HMIYPCIA61	—
AC to DC power supply module	To replace or add an AC power module	-	Panel PC 12"		HMIYPMAC61	—
Maintenance kit for Panel PC includes:	1x 3-way removable connector for 24 V $\overline{\text{---}}$ power supply 1x 3-way removable connector for 100...240 V \sim power supply 18 screw fasteners 2 Front USB port cap 5 Fan filters	-	Panel PC 12"		HMIYPMKT61	—
Fan Kit for Panel PC	To replace or add a fan	-	Panel PC 12"		HMIYPFKT061	—
Screen protection	5 protective film sheets for 12" screen	-	Panel PC 12"		MPCYK20SPSKIT	—

(1) Operating temperature details are available on our website www.schneider-electric.com.

(2) The user has to check for third party drive compliancy.

Separate components

Description	Details	Compatible with Magelis Panel PC ranges:			Reference	Weight kg/lb
		Optimum	Universal	Performance		
Storage disks, peripheral equipment, kits						
Hard disk	500 GB, blank	–	Panel PCs 15" and 19"		HMIYHDD050011	–
Flash disk SSD ≥ 60 GB	60 GB, blank	–	Panel PCs 15" and 19"		HMIYSDD006011	–
Compact Flash card (SLC technology)	2 GB, blank	All models (Panel PCs 10", 15" and 19")			HMIYCFS0211	–
	4 GB, blank	All models			HMIYCFS0411	–
	8 GB, blank	All models			HMIYCFS0811	–
SD memory card	4 GB, blank, for user data	All models	–		HMIZSD4G	–
DVD-RW drive for slide-in rack (1)	CD-RW and DVD-RW reader/writer	–	Panel PCs 15" and 19" with 2 PCI slots		HMIYDRDVRW11	–
Slide-in adaptor for storage disk (3)	Used to insert a Hard disk or an SSD Flash disk in a slide-in rack	–	Panel PCs 15" and 19" with 2 PCI slots		HMIYADSLIDEIN11	–
DVI/VGA RGB adaptor	For connecting an RGB screen to the integrated DVI port	–	All models		HMIYADDVIRGB11	–
RAID PCI card with 2 redundant Hard disks (1)	PCI card equipped with two redundant Hard disks enterprise 24/7 ≥ 500 GB	–	Panel PCs 15" and 19" with 2 PCI slots		HMIYRAIDPCI11	–
Hard disk for RAID PCI card	Replacement Hard disk for RAID PCI card HMIYRAIDPCI11	–	Panel PCs 15" and 19" with 2 PCI slots + RAID PCI card HMIYRAIDPCI11		HMIYRAIDD050011	–
Backup power supply kit	Provides an uninterruptible power supply. Includes: ■ 1 backup battery ■ 1x 3 m cordset	–	Configured Magelis Panel PCs 15" and 19" with battery-backed power supply interface module (2)		HMIYUPSKT11	–
Power supply filter for marine certification	Necessary for compliance with marine certification.	Panel PC HMI PWC7D0E01	Panel PC 15" and 19" universal DC PUC●D●●●●/ PUF●D●●●●	–	HMIYLFIMAR11	–
Maintenance kit for Panel PC	Includes: ■ 1x 3-way removable connector for 24 V $\overline{\text{---}}$ power supply ■ 1 x 3-way removable connector for 100...240 V \sim power supply ■ 2 protective covers for USB port on front panel (only on Aluminium bezel versions) ■ 10 replacement filters for fan, including: □ 5 for Magelis Panel PC with no PCI slot □ 5 for Magelis Panel PC with 2 PCI slots ■ 18 screw fasteners (Aluminium bezel) or 14 fasteners (Stainless steel bezel)	–	Panel PCs 15" and 19"		HMIYPMKT11	0.060/ 0.132
Captive USB protective cover	2 captive covers for USB port on front panel	All Aluminium bezel version models			HMIYUSBUN511	0.040/ 0.088
Fan kit for Panel PC	For fan replacement by user	–	Panel PC 15" and 19" with no PCI/PCI Express® slots		HMIYPFKT01	0.250/ 0.551
			Panel PC 15" and 19" with PCI/PCI Express® slots		HMIYPFKT21	0.800/ 1.764
Screen protection	5 protective film sheets for 10" screen	Panel PC HMI PWC5D0E01	–		MPCYK20SPSKIT	–
	5 protective film sheets for 15" screen (Aluminium and Stainless steel bezel versions)	Panel PC HMI P●C7D0E01	Panel PC HMIP●●7●●●●●		MPCYK50SPSKIT	–
	5 protective film sheets for 19" screen	–	Panel PC HMIP●●9●●●●●		MPCYK90SPSKIT	–
Cable for iDisplay 15"	Extra long (10 m/3.28 ft)	–	All models		HMIYACBDVI1011	–

(1) Operating temperature details are available on our website www.schneider-electric.com.

(2) For configured Magelis Panel PC see page 2/27.

(3) The user has to check for third party drive compliancy.

Industrial PCs

Magelis™ iPCs certified for automation
 Separate components for Magelis™ Panel PC
 Optimum, Universal and Performance ranges

2

Separate components

Description	Details	Compatible with Magelis Panel PC ranges:			Reference	Weight kg/lb
		Optimum	Universal	Performance		
Software						
Vijeo Designer Run Time license for 1 workstation	Converts the 21-day trial version of Vijeo Designer Run Time Demo to an unlimited license	All models			VJDSNRTMPC	–
License extension Intelligent Data Service for Vijeo Designer Run Time for 1 workstation	Used to track the process variables and all operator actions, and offers visibility of the key process values	All models (requires storage capacity ≥ 4 GB)			VJDSNTRCKV60M	–
External Phaseo power supply						
Phaseo regulated switch mode power supply ABL 8 Rail mounting	Input voltage: 100...120 V/200...500 V ~ (1) Output voltage: 24 V ☐☐☐ Power: 120 W	All models	–		ABL8RPS24050 (2) (3)	–
Phaseo regulated switch mode power supply ABL 4 Rail mounting	Input voltage: 100...230 V ~ (1) Output voltage: 24 V ☐☐☐ Power: 120 W	All models	–		ABL4RSM24050 (2) (3)	–

(1) Single-phase connection. Phase-to-phase connection possible on certain American line supplies, please contact our Customer Care Center.
 (2) If adding a PCI card, you need to select a Phaseo power supply with a power rating suitable for the extra consumption. Please refer to the "Phaseo power supply and transformer" catalog on our website www.schneider-electric.com.
 (3) To order this reference, please contact our Customer Care Center.

Configured Magelis Panel PC industrial PC

With the "configured iPC" service, Schneider Electric offers a vast number of configuration combinations for Magelis iPCs.

This service, available exclusively from our Customer Care Center, allows users to configure a certified product suitable for specific automation applications and environments, based on Magelis Panel PCs.

Our Customer Care Center draws up:

- The complete parts list for the configured Magelis Panel PC
- Its selling price
- The complete reference (root + code which varies according to the configuration)
- A purchase order

Ordering procedure for a configured Magelis Panel PC

- 1 Please contact our Customer Care Center.
- 2 State the reference root; this root will be completed with the variable part of the reference, once configuration is complete. The root varies depending on which Magelis Panel PC base is selected:
 - **HMIPCCW** corresponds to a configured Magelis Optimum Panel PC base, with an aluminium front panel
 - **HMIPCCV** corresponds to a configured Magelis Optimum Panel PC base, with a stainless steel front panel
 - **HMIPCCP** corresponds to a configured Magelis Universal or Performance Panel PC base, with an aluminium front panel
 - **HMIPCCCT** corresponds to a configured Magelis Universal or Performance Panel PC base, with a stainless steel front panel
- 3 Configure your Magelis Panel PC (see table below).
- 4 Confirm your order.

References		Magelis Panel PC base		Reference	Weight
Description					kg/lb
Configured Magelis Panel PC The configuration should be made up from the components below. (1)	Reference root to be stated to our Customer Care Center.	Optimum, aluminium front panel bezel		HMIPCCW (2)	–
		Optimum, stainless steel front panel bezel (15" screen only)		HMIPCCV (2)	–
		Universal and Performance, aluminium front panel bezel		HMIPCCP (2)	–
		Universal and Performance, stainless steel front panel bezel (15" screen only)		HMIPCCCT(2)	–
Description	Available on Magelis Panel PC base			Reference	Weight
	Optimum	Universal	Performance		kg/lb
	Processor Intel® ATOM™ Z510 (1.1 GHz) DDR2 RAM 24 V ~ power supply	Processor Intel® ATOM™ N270 or iCore 827E DDR2 or DDR3 RAM 24 V ~ or 100...240 V ~ power supply	Processor Intel® Core™ 2 Duo P8400 or i3 iCore DDR3 RAM 24 V ~ or 100...240 V ~ power supply		
LCD TFT LED touch screen 16 million colors	10.4" or 15"	12", 15" or 19"		(2)	–
RAM	2 GB max. (DDR2)	3 GB max. for 15" and 19" 16 GB max. for 12"	8 GB max. for 15" and 19" 16 GB max. for 12"		
Peripheral storage devices	Compact Flash card 8 GB max. or CFast card 16 GB max. (SLC technology)				
	Up to 2 Flash disks SSD ≥ 60 GB				
	Up to 2 Hard disks ≥ 500 GB (enterprise 24/7)				
Other peripheral device	DVD-RW drive				
PCI slot configuration	No PCI slot				
	1 PCI + 1 PCI Express® for 12" only				
	1 PCI + 1 PCI Express® or 2 PCI				
Operating systems	Windows® Embedded Standard 2009				
	Windows® Embedded Standard 7 32-bit				
	Windows® XP PRO SP3				
	Windows® 7 Ultimate 32-bit				
	Windows® 7 Ultimate 64-bit				
Software	Vijeo Designer Run Time				
	Vijeo Citect				
Assembled options	RAID with 2 redundant Hard disks				
	Interface module for backup power supply (4)				
	SRAM interface for 12" (default on others)				
	Additional RS232C/RS422/RS485 serial link interface				
	1 or 2 Ethernet ports	2 Ethernet ports			

1) Please contact our Customer Care Center.

(2) The reference of configured Magelis Panel PC industrial PCs is made up of a root (HMIPCCW, HMIPCCV, HMIPCCP or HMIPCCCT) followed by a variable part generated during configuration.

(3) Required to connect backup power supply kits HMIYUPSKT●1 (see page 2/26).

2

Old PC Panels		Replaced by Magelis Panel PC		Compatibility	
Description	References	Description	References	Cut-out for flush mounting	Screen definition
Magelis Smart (with Compact Flash card)		Magelis Panel PC (Optimum or Universal range)			
Magelis Smart 8.4" screen, 24 V ~	MPCST11NDJ00T	Magelis Optimum Panel PC 10" screen, 24 V ~	HMIPWC5D0E01		
Magelis Smart 8.4" screen, 100...240 V ~	MPCST11NAJ00T	Magelis Optimum Panel PC 10" screen, 24 V ~	HMIPWC5D0E01 + Phaseo power supply (1)		
Magelis Smart 12" screen, 24 V ~	MPCST21NDJ20T	Magelis Universal Panel PC 12" screen, 24 V ~	HMIPUC6D0E01		
		Magelis Optimum Panel PC 15" screen, 24 V ~, ATEX	HMIPVC7D0E01		
Magelis Smart 12" screen, 240 V ~	MPCST21NAJ20T	Magelis Universal Panel PC 12" screen, 240 V ~	HMIPUC6A0E01		
Magelis Smart 15" screen, 24 V ~	HMIPSC7DE03 MPCST52NDJ20T	Magelis Optimum Panel PC 15" screen, 24 V ~	HMIPWC7D0E01		
		Magelis Optimum Panel PC 15" screen, 24 V ~, ATEX	HMIPVC7D0E01 HMIPCCT (3)		
		Magelis Universal Panel PC 15" screen, 24 V ~	HMIPUC7D0E01		
Magelis Smart 15" screen, 100...240 V ~	HMIPSC7AE03 MPCST52NAJ20T MPCST52NAJ20H	Magelis Optimum Panel PC 15" screen, 24 V ~	HMIPWC7D0E01 + Phaseo power supply (1)		
		Magelis Universal Panel PC 15" screen, 24 V ~	HMIPUC7D0E01 + Phaseo power supply (1)		
Magelis Smart+ (with Flash disk)		Magelis Panel PC (Universal range)			
Magelis Smart+ 15" screen, 24 V ~	HMIPSF7DP03	Magelis Universal Panel PC 15" screen, 24 V ~	HMIPUF7D0P01		
		Magelis Universal Panel PC 15" screen, 24 V ~, ATEX	HMIPTF7D2P01		
Magelis Smart+ 15" screen, 100...240 V ~	HMIPSF7AP03	Magelis Universal Panel PC 15" screen, 100...240 V ~	HMIPUF7A0P01		
		Magelis Universal Panel PC 15" screen, 100...240 V ~, ATEX	HMIPCCT (3)		
Magelis Smart+ 15" screen, 100...240 V ~ Vijeo Citect Lite 1200 I/O	HMIPSF7APL3 (2)	Magelis Universal Panel PC 15" screen, 24 V ~	HMIPUF7D0PL1 (2)		
		Vijeo Citect Lite 1200 I/O			
		Magelis Universal Panel PC 15" screen, 100...240 V ~, ATEX	HMIPCCT (3)		
Magelis Smart+ 15" screen, 100...240 V ~ Vijeo Citect Full 500 I/O	HMIPSF7APF3	Magelis Universal Panel PC 15" screen, 100...240 V ~	HMIPUF7A2PF1		
		Vijeo Citect Full 500 I/O			
		Magelis Universal Panel PC 15" screen, 100...240 V ~, ATEX	HMIPCCT (3)		
Magelis Compact iPC - General Purpose (with Hard disk)		Magelis Panel PC (Universal range)			
Magelis Compact iPC - General Purpose - 12" screen, 240 V ~	MPCKT22NAX20N	Magelis Universal Panel PC 12" screen, 240 V ~	HMIPUH6A0701 (4)		
Magelis Compact iPC - General Purpose 15" screen, 24 V ~	MPCKT55NDX20N	Magelis Universal Panel PC 15" screen, 24 V ~	HMIPUH7D2P01		
		Magelis Universal Panel PC 15" screen, 24 V ~, ATEX	HMIPTH7D2P01		
Magelis Compact iPC General Purpose - 15" screen, 100...240 V ~	MPCKT55NAX20N	Magelis Universal Panel PC 15" screen, 100...240 V ~	HMIPUH7A2P01		
Magelis Compact iPC - Heavy Duty (with Flash disk)		Magelis Panel PC (Universal range)			
Magelis Compact iPC - Heavy Duty - 12" screen, 240 V ~	MPCKT22MAX20N	Magelis Universal Panel PC 12" screen, 240 V ~	HMIPUF6A0701 (4)		
Magelis Compact iPC - Heavy Duty 15" screen, 100...240 V ~	MPCKT55MAX20N	Magelis Universal Panel PC 15" screen, 100...240 V ~	HMIPUF7A2P01		
		Cut-out or screen definition	Identical		
			Different		

(1) ABL8RPS24050 or ABL4RSM24050 Phaseo power supply (see page 2/26).

(2) Correspondence between different power supplies: 100...240 V ~/24 V ~.

(3) Made-to-order configuration (see page 2/27).

(4) if necessary, add module HMIYPC1161 with 1 PCI slot (see page 2/26).

Old PC Panels		Replaced by Magelis Panel PC		Compatibility	
Description	References	Description	References	Cut-out for flush mounting	Screen definition
Magelis Compact iPC - Heavy Duty (with Flash disk) (continued)		Magelis Panel PC (Universal range) (continued)			
Magelis Compact iPC - Heavy Duty 15" screen, 100...240 V ~ Vijeo Citect Lite 1200 I/O	MPCKT55MAX20L	Magelis Universal Panel PC 15" screen, 100...240 V ~ Vijeo Citect Full 500 I/O	HMIPUF7A2PF1		
Magelis Compact iPC - Heavy Duty 15" screen, 100...240 V ~ Vijeo Citect Full 500 I/O	MPCKT55MAX20V	Configured Magelis Panel PC Universal Panel PC base with: ■ 15" screen, 100...240 V ~ ■ Vijeo Citect Lite 1200 I/O	HMIPCCP (5)		
Old Front Panels + Flex PC BOX		Replaced by Magelis iPC		Compatibility	
Description	References	Description	References (1)	Cut-out for flush mounting	Screen definition
Front Panels + Magelis Flex PC BOX		Magelis Panel PC or Magelis iDisplay + Magelis BOX PC			
Front Panel with 12" touch screen and keypad + Magelis Flex PC BOX 24 V ~ or 100...240 V ~ (2)	MPCYB20NNN00N + MPCF/H.....	Magelis Optimum/Universal/Performance Panel PC 15" touch screen, 24 V ~ or 100...240 V ~	HMIP...7..... (3)		
		Magelis iDisplay with 15" screen, 100...240 V ~ + Magelis Universal/Performance BOX PC, 24 V ~	MPCYT50NAN00N (3) + HMIB..... (4)		
		Magelis iDisplay with 15" screen, 24 V ~ + Magelis Universal/Performance BOX PC, 24 V ~	HMIDID7DT0 (3) + HMIB..... (4)		
		Magelis iDisplay with 15" screen and keypad, 100...240 V ~ + Magelis Universal/Performance BOX PC, 24 V ~	MPCNB50NAN00N + HMIB..... (4)		
Front Panel with 15" touch screen + Magelis Flex PC BOX 24 V ~ or 100...240 V ~ (2)	MPCYT50NNN00N + MPCF/H.....	Magelis Optimum/Universal/Performance Panel PC 15" touch screen, 24 V ~ or 100...240 V ~	HMIP...7.....		
		Magelis iDisplay with 15" screen, 100...240 V ~ + Magelis Universal/Performance BOX PC, 24 V ~	MPCYT50NAN00N + HMIB..... (4)		
		Magelis iDisplay with 15" screen, 24 V ~ + Magelis Universal/Performance BOX PC, 24 V ~	HMIDID7DT0 + HMIB..... (4)		
Front Panel with 15" touch screen and keypad + Magelis Flex PC BOX 24 V ~ or 100...240 V ~ (2)	MPCYB50NNN00N + MPCF/H.....	Magelis iDisplay with 15" screen and keypad, 100...240 V ~ + Magelis Universal/Performance BOX PC, 24 V ~	MPCNB50NAN00N + HMIB..... (4)		
Front Panel with 19" touch screen + Magelis Flex PC BOX 24 V ~ or 100...240 V ~ (2)	MPCYT90NNN00N + MPCF/H.....	Magelis Universal/Performance Panel PC 19" touch screen, 24 V ~ or 100...240 V ~	HMIP...9.....		
		Magelis iDisplay with 19" screen, 100...240 V ~ + Magelis Universal/Performance BOX PC, 24 V ~	MPCYT90NAN00N + HMIB..... (4)		
				Cut-out or screen definition	Identical Different

(1) Complete references: Magelis Panel, see pages 2/5, 2/22 or 2/24 / Magelis iDisplay / Magelis BOX PC, refer to our website www.schneider-electric.com.
 (2) Power provided by the Magelis Flex PC BOX CPU; the type of power supply depends on the CPU model.
 (3) Correspondence between different screen functions: touch screen + keypad/touch screen.
 (4) Correspondence between possibly different power supplies: 100...240 V ~/24 V ~.
 (5) Made-to-order configuration (see page 2/27).

Magelis™ Box PC - Universal and Performance ranges

Selection guide page 3/2

■ **Presentation**

- Overview of the range
 - Universal Magelis BOX PC range..... page 3/4
 - Performance Magelis BOX PC range page 3/4
 - Made-to-order Magelis BOX PC range page 3/5
- USB accessories for HMI terminals page 3/5

■ **Description**

- Universal Magelis BOX PC CPUs, 1 PCI slot..... page 3/6
- Universal and Performance Magelis BOX PC CPUs, 2 PCI slots..... page 3/6
- Performance Magelis BOX PC CPUs, 5 PCI slots page 3/7

■ **Reference**

- Universal Magelis BOX PC, 1 or 2 PCI slots page 3/8
- Performance Magelis BOX PC, 2 or 5 PCI slots..... page 3/8
- Separate components page 3/9
- Configured Magelis BOX PC industrial PC page 3/10

■ **Substitution**page 3/11



Industrial PCs

Magelis™ iPCs certified for automation
Magelis™ BOX PC
Universal and Performance ranges

Type	Universal range - 1 PCI slot	
Industrial environments	Maintenance-free	Standard



Fanless	*****	*****	*****
Non-rotative storage drive	*****	*****	-
CPU (1)	Intel® ATOM™ N270 (1.6 GHz)		
Processor	1 PCI		
PCI slot	Compact Flash card ≥ 4 GB (SLC technology)	Flash disk SSD ≥ 60 GB	Hard disk enterprise 24/7 ≥ 500 GB
Storage	1 GB	HMIBUFND1PF1: 2 GB HMIBUFND1P01: 1 GB	1 GB
RAM (2)	-		
Integrated DVD-RW drive	1x slide-in compact rack for storage disk		
Slide-in rack for peripheral device	1x slide-in compact rack for storage disk (Flash disk or Hard disk included)		
Integrated ports	2x Ethernet 10/100/1000 Mbps 1x USB 2.0 (1 A) on the front panel + 4x USB 2.0 (0.5 and 1 A) at the top 2x RS232C 1x DVI (VGA RGB adaptor, optional)		
Optional ports	1x RS232C/RS422/RS485 HMIYRAIDPCI11 RAID PCI card with 2 redundant hard disks (see page 2/27)		
Optional RAID PCI card	Windows® Embedded Standard 2009	Windows® XP Professional SP3	
Operating system	24 V ~ (± 25 %) (4)		
Supply voltage	Voltage		
	Current (excluding PCI card)		
Mounting	Vertical, at the back of the enclosure ("book" format) or flat (requiring fan kit HMIYBFKT11)		
Overall dimensions (W x H x D in mm)	82 x 270 x 251		
Temperature	during operation		
Vibration resistance	Continuous		
during operation	1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (5)		
	0.125 g from 5...100 Hz		
	Non-continuous		
	3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (5)		
	0.250 g from 5...100 Hz		
	Merchant navy IACS E10		
	1 mm amplitude from 5...13.2 Hz, 0.7 g from 13.2...100 Hz, 90 minutes endurance		
Shock resistance	During operation		
	15 g/11 ms conforming to IEC 60068-2-27 test Ea		
Standards and certifications	CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), ATEX II 3 Dust zone 22, C-Tick, GOST		
Marine certification	Germanischer Lloyd (Bridge Class)		
	With additional power supply filter HMIYLFIMAR11		
Compatible screens	Complete range of Magelis iDisplay screens (refer to our website www.schneider-electric.com)		
Software	Vijeo Designer Run Time Demo		
	Vijeo Designer Run Time Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC)		
References	Vijeo Designer Run Time Demo	HMIBUFND1PF1	-
	Vijeo Citect Full 500 I/O	HMIBUCND1E01	HMIBUFND1P01
	Vijeo Designer Run Time Demo	HMIBUHND1P01	HMIBUHND1P01
Pages	3/8		
Made-to-order configuration	See configured Magelis BOX PC on page 3/10		

(1) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/10).
(2) For other available options (interface for backup battery, etc.) in made-to-order configuration, see pages 3/9 and 3/10.

Universal range - 2 PCI slots		Performance range - 2 PCI slots		Performance range - 5 PCI slots	
Maintenance-free	Standard	Harsh	Standard	Harsh	Standard



*****	*****	-	-	-	-
*****	-	*****	-	*****	-
Intel® ATOM™ N270 (1.6 GHz)	Intel® Core™ 2 Duo P8400 (2.26 GHz) + Intel® GM45 chipset		5 (2 PCI + 3 PCI Express®)		
2 (1 PCI + 1 PCI Express®)	Flash disk SSD ≥ 60 GB	Hard disk enterprise 24/7 ≥ 500 GB	Flash disk SSD ≥ 60 GB	Hard disk enterprise 24/7 ≥ 500 GB	Flash disk SSD ≥ 60 GB
Flash disk SSD ≥ 60 GB	1 GB	1 GB	Flash disk SSD ≥ 60 GB	Hard disk enterprise 24/7 ≥ 500 GB	Hard disk enterprise 24/7 ≥ 500 GB
HMIBUFND2PF1: 2 GB HMIBUFND2P01: 1 GB	1 GB	1 GB	HMIBPFDD27F1: 4 GB HMIBPFDD2701: 2 GB	2 GB	HMIBPFDD57F1: 4 GB HMIBPFDD5701: 2 GB
1	1x slide-in compact rack for storage disk (Flash disk or Hard disk included)		1x slide-in compact rack for storage disk (Flash disk or Hard disk included)		1x slide-in compact rack for storage disk (Flash disk or Hard disk included)
	1x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)		1x slide-in rack for DVD-RW drive (included) or storage disk via adaptor (optional)		1x slide-in rack for DVD-RW drive (supplied)
					1x slide-in rack for storage disk via adaptor (optional)
2x Ethernet 10/100/1000 Mbps	2x Ethernet 10/100/1000 Mbps		2x Ethernet 10/100/1000 Mbps		2x Ethernet 10/100/1000 Mbps
1x USB 2.0 (1 A) on the front panel + 4x USB 2.0 (0.5 and 1 A) at the top	1x USB 2.0 (1 A) on the front panel + 4x USB 2.0 (0.5 and 1 A) at the top		1x USB 2.0 (1 A) on the front panel + 4x USB 2.0 (0.5 and 1 A) at the top		1x USB 2.0 (1 A) on the front panel + 4x USB 2.0 (0.5 and 1 A) at the top
2x RS232C	2x RS232C		2x RS232C		2x RS232C
1x DVI (VGA RGB adaptor, optional)	1x DVI (VGA RGB adaptor, optional)		1x DVI (VGA RGB adaptor, optional)		1x DVI (VGA RGB adaptor, optional)
1x RS232C/RS422/RS485, 1x DVI	1x RS232C/RS422/RS485, 1x DVI		1x RS232C/RS422/RS485, 1x DVI		1x RS232C/RS422/RS485, 1x DVI
HMIYRAIDPCI11 RAID PCI card with 2 redundant hard disks (see page 2/27)	HMIYRAIDPCI11 RAID PCI card with 2 redundant hard disks (see page 2/27)		HMIYRAIDPCI11 RAID PCI card with 2 redundant hard disks (see page 2/27)		HMIYRAIDPCI11 RAID PCI card with 2 redundant hard disks (see page 2/27)
Windows® XP Professional SP3	Windows® XP Professional SP3		Windows® 7 Ultimate 64-bit		Windows® 7 Ultimate 64-bit
24 V ~ (± 25 %) (4)	24 V ~ (± 25 %) (4)		24 V ~ (± 25 %) (4)		24 V ~ (± 25 %) (4)
Nominal current 6 A. Typical inrush current 7 A, 50 A < 300 μs	Nominal current 6 A. Typical inrush current 7 A, 50 A < 300 μs		Nominal current 6 A. Typical inrush current 7 A, 50 A < 300 μs		Nominal current 6 A. Typical inrush current 7 A, 50 A < 300 μs
Vertical, at the back of the enclosure ("book" format) or flat (requiring fan kit HMIYBFKT11)	Vertical, at the back of the enclosure ("book" format) or flat (requiring fan kit HMIYBFKT21, for BOX PC HMIBU●ND2P●1)		Vertical, at the back of the enclosure ("book" format) or flat (requiring fan kit HMIYBFKT21, for BOX PC HMIBU●ND2P●1)		Vertical, at the back of the enclosure ("book" format) or flat (requiring fan kit HMIYBFKT21, for BOX PC HMIBU●ND2P●1)
121 x 270 x 251	136 x 270 x 251		136 x 270 x 251		217 x 270 x 251
Conforming to IEC 61132-2, UL 508: 0...50 °C (mounted vertically) or 0...45 °C (mounted flat)	Conforming to IEC 61132-2, UL 508: 0...50 °C (mounted vertically) or 0...45 °C (mounted flat)		Conforming to IEC 61132-2, UL 508: 0...50 °C (mounted vertically) or 0...45 °C (mounted flat)		Conforming to IEC 61132-2, UL 508: 0...50 °C (mounted vertically) or 0...45 °C (mounted flat)
1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (5)	0.125 g from 5...100 Hz	1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (5)	0.125 g from 5...100 Hz	1.75 mm amplitude from 2...9 Hz, 0.5 g from 9...200 Hz (5)	0.125 g from 5...100 Hz
3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (5)	0.250 g from 5...100 Hz	3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (5)	0.250 g from 5...100 Hz	3.5 mm amplitude from 2...9 Hz, 1 g from 9...200 Hz (5)	0.250 g from 5...100 Hz
1 mm amplitude from 5...13.2 Hz, 0.7 g from 13.2...100 Hz, 90 minutes endurance	-	1 mm amplitude from 5...13.2 Hz, 0.7 g from 13.2...100 Hz, 90 minutes endurance	-	1 mm amplitude from 5...13.2 Hz, 0.7 g from 13.2...100 Hz, 90 minutes endurance	-
15 g/11 ms conforming to IEC 60068-2-27 test Ea	15 g/11 ms conforming to IEC 60068-2-27 test Ea		15 g/11 ms conforming to IEC 60068-2-27 test Ea		15 g/11 ms conforming to IEC 60068-2-27 test Ea
CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), ATEX II 3 Dust zone 22, C-Tick, GOST	CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), ATEX II 3 Dust zone 22, C-Tick, GOST		CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), ATEX II 3 Dust zone 22, C-Tick, GOST		CE, cULus (UL 508, CSA 22.2 n°142), cULus Haz Loc Class I Div 2 (ANSI/ISA 12.12.01, UL 1604, CSA 22.2 n°213), ATEX II 3 Dust zone 22, C-Tick, GOST
With additional power supply filter HMIYLFIMAR11	With additional power supply filter HMIYLFIMAR11		With additional power supply filter HMIYLFIMAR11		With additional power supply filter HMIYLFIMAR11
Complete range of Magelis iDisplay screens (refer to our website www.schneider-electric.com)	Complete range of Magelis iDisplay screens (refer to our website www.schneider-electric.com)		Complete range of Magelis iDisplay screens (refer to our website www.schneider-electric.com)		Complete range of Magelis iDisplay screens (refer to our website www.schneider-electric.com)
Vijeo Designer Run Time Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC)	Vijeo Designer Run Time Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC)		Vijeo Designer Run Time Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC)		Vijeo Designer Run Time Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC)
HMIBUFND2PF1	-	HMIBPFDD27F1	-	HMIBPFDD57F1	-
HMIBUFND2P01	HMIBUHND2P01	HMIBPFDD2701	HMIBPHDD2701	HMIBPFDD5701	HMIBPHDD5701
3/8	3/8		3/8		3/8
See configured Magelis BOX PC on page 3/10	See configured Magelis BOX PC on page 3/10		See configured Magelis BOX PC on page 3/10		See configured Magelis BOX PC on page 3/10

(4) For an ~ supply voltage, an external Phaseo power supply can be used (see page 3/9).
(5) Conforming to IEC 60068-2-6 Fc.

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ BOX PC

Universal and Performance ranges



Universal BOX PC
1 PCI



Universal BOX PC/Performance BOX PC
1 PCI + 1 PCI Express®



Performance BOX PC
2 PCI + 3 PCI Express®

Presentation

The Magelis BOX PC industrial PC offer includes products that are rugged and certified for automation applications. With its Universal (1 or 2 PCI slots) and Performance (2 or 5 PCI slots) ranges, this Magelis BOX PC offer is suitable for all types of use that do not require an integrated screen:

- In a maintenance-free environment: Fanless Magelis BOX PC (unaffected by dust, no filters to clean, etc.) and without any rotating parts such as a Hard disk. Data storage on Compact Flash card or on Flash disk offers good resistance to vibration and long life.
- In a harsh environment: Magelis BOX PC without Hard disk
- In a standard environment: Magelis BOX PC with Hard disk

In addition to the referenced offer, the flexibility offered by the modular design allows made-to-order configuration of the Magelis BOX PC (see page 3/10).

This offer is compatible with Magelis iDisplay screens (refer to our website www.schneider-electric.com).

Overview of the range

Universal Magelis BOX PC range (1) (2)

The Universal BOX PC range is equipped with the fanless Intel® ATOM™ N270 processor (1.6 GHz) and DDR2 RAM (3). It is specifically for the following environments:

- "Maintenance-free" (fanless, with solid-state storage disk):
 - **HMIBUCND1E01:**
 - 1 PCI slot/Compact Flash card/Windows® Embedded Standard 2009, etc.
 - **HMIBUFND1P01** and **HMIBUFND1PF1:**
 - 1 PCI slot, Flash disk SSD, Windows® XP Professional SP3, etc.
 - **HMIBUFND2P01** and **HMIBUFND2PF1:**
 - 1 PCI + 1 PCI Express® slot/Flash disk SSD/Windows® XP Professional SP3, etc.
- Standard industrial environments (with Hard disk):
 - **HMIBUHND1P01:**
 - 1 PCI slot/Hard disk/Windows® XP Professional SP3, etc.
 - **HMIBUHND2P01:**
 - 1 PCI + 1 PCI Express® slot/Hard disk/Windows® XP Professional SP3, etc.

Performance Magelis BOX PC range (1) (2)

The Performance BOX PC range is equipped with the Intel® Core™ 2 Duo P8400 processor (2.26 GHz) + Intel® GM45 chipset and DDR3 RAM (3). It is specifically for the following environments:

- Harsh industrial environments (with solid-state storage disk):
 - **HMIBPFDD2701** and **HMIBPFDD27F1:**
 - 1 PCI + 1 PCI Express® / Flash disk SSD/Windows® 7 Ultimate 64-bit, etc.
 - **HMIBPFDD5701** and **HMIBPFDD57F1:**
 - 2 PCI + 3 PCI Express® / Flash disk SSD/Windows® 7 Ultimate 64-bit, etc.
- Standard industrial environments (with Hard disk):
 - **HMIBPHDD2701:**
 - 1 PCI + 1 PCI Express® / Hard disk/Windows® 7 Ultimate 64-bit, etc.
 - **HMIBPHDD5701:**
 - 2 PCI + 3 PCI Express® / Hard disk/Windows® 7 Ultimate 64-bit, etc.

(1) Types of PCI slot: Half-format PCI 2.2 and half-format PCI Express® (1x for Magelis BOX PC 1 or 5 slots, 4x for Magelis BOX PC 2 slots).

(2) For description, see pages 3/6 and 3/7.

(3) Not user-expandable; increased capacity available in made-to-order configuration (see page 3/10).

Presentation (continued)

Overview of the range (continued)

Made-to-order Magelis BOX PC range (1)

On Universal and Performance Magelis BOX PC bases, it is possible to customize the CPU by selecting:

- The capacity of the Compact Flash card and the RAM
- The number of PCI and PCI Express® slots
- The operating system and dedicated HMI software
- Additional assembled options: PCI RAID card with 2 redundant Hard disks (2), battery-backed power supply interface module, etc.

For more information on HMIPCCB1 offer, see page 3/10.

USB accessories for HMI terminals

The Magelis™ USB accessories are designed to expand selection range of user applications by offering value-added/differentiated HMI solutions. These innovative USB accessories can be easily installed and operated with HMI terminals (3).

The Magelis USB accessories supported by Magelis BOX PC include:

- Harmony XB5S biometric USB switch
- Magelis HMIZ illuminated USB switch

For more information on HMI USB accessories, please refer to our website www.schneider-electric.com.

(1) Types of PCI slot: Half-format PCI 2.2 and half-format PCI Express® (1x for Magelis BOX PC 1 or 5 slots, 4x for Magelis BOX PC 2 slots).

(2) Operating temperature details available on our website www.schneider-electric.com.

(3) Requires Vijeo Designer software running on the Magelis Box PC.


Description

Industrial PCs


Magelis™ iPCs certified for automation

Magelis™ BOX PC


Universal and Performance ranges

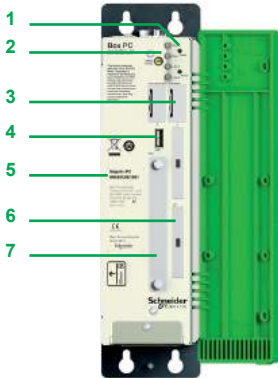


Front panel of Magelis BOX PC, door open
1 PCI slot

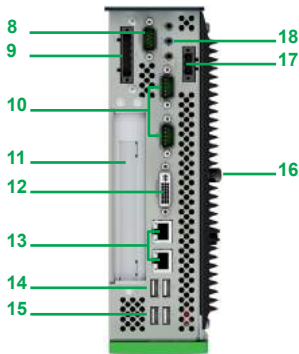

Top panel of Magelis BOX PC
1 PCI slot

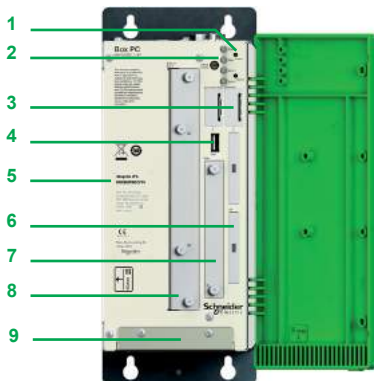

Front panel of Magelis BOX PC, door open
2 PCI slots

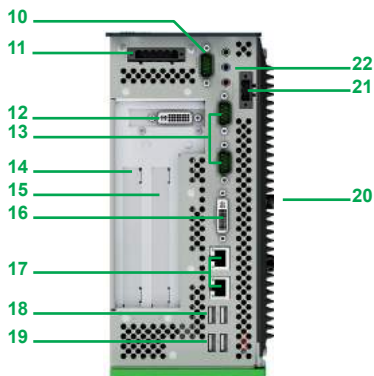

Top panel of Magelis BOX PC
2 PCI slots

Description

Universal Magelis BOX PC CPUs, 1 PCI slot

Front panel, door open

- 1 2 pushbuttons: 1 for power supply and 1 for resetting
- 2 4 status and power supply LEDs, also visible with the front panel door closed
- 3 Battery
- 4 USB 2.0 port (1 A max.)
- 5 Identification (reference, serial number, etc.)
- 6 Slot for Compact Flash card:
 - With Compact Flash (SLC technology) \geq 4 GB (BOX PC HMIBUCND1E01)
 - Free slot (BOX PC HMIBUFND1P●1, BOX PC HMIBUHND1P01)
- 7 Slide-in compact rack:
 - Free slot (BOX PC HMIBUCND1E01)
 - With Flash disk SSD \geq 60 GB (BOX PC HMIBUFND1P●1)
 - With Hard disk enterprise 24/7 \geq 500 GB (BOX PC HMIBUHND1P01)

Top panel

- 8 Free slot for additional RS232C/RS422/RS485 serial link interface (HMIYBINSL11) (1)
- 9 Free slot for battery-backed power supply interface module (2)
- 10 2 RS232C ports
- 11 Half-format PCI 2.2 slot
- 12 DVI port - RGB connection with adaptor (HMIYADDVIRGB11) (1)
- 13 2 Ethernet 10/100/1000 Mbps ports
- 14 2 USB 2.0 ports (0.5 A max.)
- 15 2 USB 2.0 ports (1 A max.)
- 16 Heat sink (3)
- 17 Connector for the CPU 24 V \sim /6 A power supply (4)
- 18 Micro input, line input/line output

Universal and Performance Magelis BOX PC CPUs, 2 PCI slots

Front panel, door open

- 1 2 pushbuttons: 1 for the power supply and 1 for resetting
- 2 4 status and power supply LEDs, also visible with the front panel door closed
- 3 Battery
- 4 USB 2.0 port (1 A max.)
- 5 Identification (reference, serial number, etc.)
- 6 Free slot for Compact Flash card
- 7 Slide-in compact rack:
 - With Flash disk SSD \geq 60 GB (BOX PC HMIB●F●D2●●1)
 - With Hard disk enterprise 24/7 \geq 500 GB (BOX PC HMIB●H●D2●01)
- 8 Slide-in rack with the DVD-RW drive included (5). Can be used for an additional storage disk with adaptor (HMIYADSLIDEIN11) (1)
- 9 Access to the fan filters (7) (BOX PC HMIBP●DD●7●●1)

Top panel

- 10 Free slot for additional RS232C/RS422/RS485 serial link interface (HMIYBINSL11) (1)
- 11 Free slot for battery-backed power supply interface module (2)
- 12 Free slot for additional DVI interface (HMIYINDVIRGB11) (1)
- 13 2 RS232C ports
- 14 Half-format PCI Express® 4x slot
- 15 Half-format PCI 2.2 slot
- 16 DVI port - RGB connection with adaptor (HMIYADDVIRGB11) (1)
- 17 2 Ethernet 10/100/1000 Mbps ports
- 18 2 USB 2.0 ports (0.5 A max.)
- 19 2 USB 2.0 ports (1 A max.)
- 20 Heat sink (3)
- 21 Connector for the CPU 24 V \sim /6 A power supply (4)
- 22 Micro input, line input/line output

(1) To be ordered separately (see page 3/9).


(2) To be ordered separately in made-to-order configuration (see page 3/10).

(3) For installation, please refer to the "product data sheet" on our website www.schneider-electric.com.


(4) Consumption excluding additional PCI card. For an \sim supply voltage, an external Phaseo power supply can be used (see page 3/9).

(5) Operating temperature details available on our website www.schneider-electric.com.

(6) Fans can be replaced by the user using the BOX PC fan kit (to be ordered separately, see page 3/9).

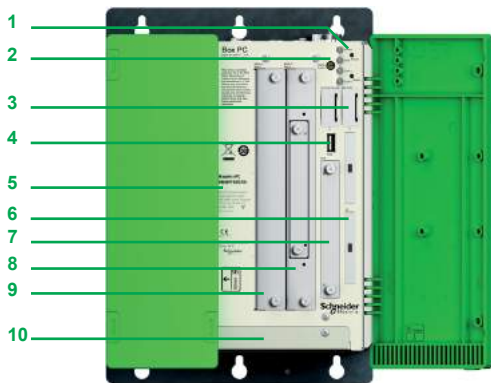

Front panel of Magelis BOX PC, door open
5 PCI slots

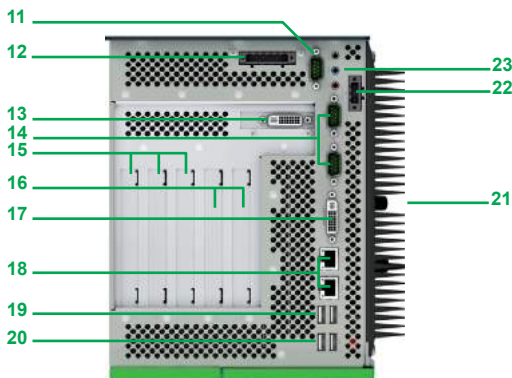

Top panel of Magelis BOX PC
5 PCI slots

Description (continued)

Performance Magelis BOX PC CPUs, 5 PCI slots

Front panel, door open

- 1 2 pushbuttons: 1 for power supply and 1 for resetting
- 2 4 status and power supply LEDs, also visible with the front panel door closed
- 3 Battery
- 4 USB 2.0 port (1 A max.)
- 5 Identification (reference, serial number, etc.)
- 6 Free slot for Compact Flash card
- 7 Slide-in compact rack:
 - With Flash disk SSD ≥ 60 GB (BOX PC **HMIBPFDD57●1**)
 - With Hard disk enterprise 24/7 ≥ 500 GB (BOX PC **HMIBPHDD5701**)
- 8 Slide-in rack with the DVD-RW drive included (1)
- 9 Slide-in rack for additional storage disk with adaptor (**HMIYADSLIDEIN11**) (2)
- 10 Access to the fan filters (3)

Top panel

- 11 Free slot for additional RS232C/RS422/RS485 serial link interface (**HMIYBINSL11**) (2)
- 12 Free slot for battery-backed power supply interface module (4)
- 13 Free slot for additional DVI interface (**HMIYINDVIRGB11**) (2)
- 14 2 RS232C ports
- 15 3 half-format PCI Express® 1x slots
- 16 2 half-format PCI 2.2 slots
- 17 DVI port - RGB connection with adaptor (**HMIYADDVIRGB11**) (1)
- 18 2 Ethernet 10/100/1000 Mbps ports
- 19 2 USB 2.0 ports (0.5 A max.)
- 20 2 USB 2.0 ports (1 A max.)
- 21 Heat sink (5)
- 22 Connector for the CPU 24 V \sim /6 A power supply (6)
- 23 Micro input, line input/line output

(1) Operating temperature details available on our website www.schneider-electric.com.

(2) To be ordered separately (see page 3/9).

(3) Fans can be replaced by the user using the BOX PC fan kit (to be ordered separately, see page 3/9).

(4) To be ordered separately in made-to-order configuration (see page 3/10).

(5) Refer to the installation precautions available on our website www.schneider-electric.com.

(6) Consumption excluding additional PCI card. For an \sim supply voltage, an external Phaseo power supply can be used (see page 3/9).

Industrial PCs

Magelis™ iPCs certified for automation

Magelis™ BOX PC

Universal and Performance ranges



HMIBU●ND1●●1

Universal Magelis BOX PC, 1 or 2 PCI slots

(Intel® ATOM™ N270 processor (1.6 GHz)/DDR2 RAM/24 V --- supply voltage) (1)

PCI slot	Operating system	Software	Storage disk	DDR2 RAM (4)	Reference	Weight kg/lb
For maintenance-free environment						
1 PCI	Windows® Embedded Standard 2009 (2)	Vijeo Designer RT Demo (3)	Compact Flash ≥ 4 GB (SLC technology)	1 GB	HMIBUCND1E01	4.000/ 8.818
	Windows® XP Professional SP3	Vijeo Designer RT Demo (3)	Flash disk SSD ≥ 60 GB	1 GB	HMIBUFND1P01	4.000/ 8.818
1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (3)	Flash disk SSD ≥ 60 GB	2 GB	HMIBUFND1PF1	4.000/ 8.818
		Vijeo Designer RT Demo (3) Vijeo Citect Full 500 I/O	Flash disk SSD ≥ 60 GB	1 GB	HMIBUFND2P01	5.000/ 11.023
1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (3)	Flash disk SSD ≥ 60 GB	2 GB	HMIBUFND2PF1	5.000/ 11.023
		Vijeo Designer RT Demo (3) Vijeo Citect Full 500 I/O	Flash disk SSD ≥ 60 GB	2 GB	HMIBUFND2PF1	5.000/ 11.023

For standard industrial environment

1 PCI	Windows® XP Professional SP3	Vijeo Designer RT Demo (3)	Hard disk enterprise 24/7 ≥ 500 GB	1 GB	HMIBUHND1P01	4.000/ 8.818
1 PCI + 1 PCI Express®	Windows® XP Professional SP3	Vijeo Designer RT Demo (3)	Hard disk enterprise 24/7 ≥ 500 GB	1 GB	HMIBUHND2P01	5.000/ 11.023

Performance Magelis BOX PC, 2 or 5 PCI slots

(Intel® Core™ 2 Duo P8400 processor (2.26 GHz) / DDR3 RAM / 24 V --- supply voltage) (1)

PCI slot	Operating system	Software	Storage disk	DDR3 RAM (4)	Reference	Weight kg/lb
For standard industrial environment						
1 PCI + 1 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (3)	Hard disk enterprise 24/7 ≥ 500 GB	2 GB	HMIBPHDD2701	6.000/ 13.227
		Vijeo Designer RT Demo (3)	Hard disk enterprise 24/7 ≥ 500 GB	2 GB	HMIBPHDD5701	7.000/ 15.432
2 PCI + 3 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (3)	Hard disk enterprise 24/7 ≥ 500 GB	2 GB	HMIBPHDD5701	7.000/ 15.432
		Vijeo Designer RT Demo (3) Vijeo Citect Full 500 I/O	Flash disk SSD ≥ 60 GB	4 GB	HMIBPFDD27F1	6.000/ 13.227
2 PCI + 3 PCI Express®	Windows® 7 Ultimate 64-bit	Vijeo Designer RT Demo (3)	Flash disk SSD ≥ 60 GB	2 GB	HMIBPFDD5701	7.000/ 15.432
		Vijeo Designer RT Demo (3) Vijeo Citect Full 500 I/O	Flash disk SSD ≥ 60 GB	4 GB	HMIBPFDD57F1	7.000/ 15.432

(1) For an ~ supply voltage, an external Phaseo power supply can be used (see page 3/9).

(2) Windows® Embedded Standard 2009 supplied in 9 languages (English, French, German, Italian, Portuguese, Spanish, Swedish, Chinese, Russian). Also includes:

- Acrobat Reader, Word/Excel/Power Point Viewer
- Framework.Net 3.5
- Web browser
- Vijeo Citect Web Client
- Vijeo Designer Run Time Demo (3)

(3) Vijeo Designer RT (Run Time) Demo (21-day trial version). Unlimited license, to be ordered separately (VJDSNRTMPC) (see page 3/9).

(4) Memory capacity not user-expandable; increased capacity available in made-to-order configuration (see page 3/10).



HMIBU●ND2P●1
HMIBP●DD27●1



HMIBP●DD57●1

Separate components

Description	Details	Compatible with Magelis BOX PC ranges:		Reference	Weight kg/lb
		Universal	Performance		
Storage disks, peripheral equipment, kits					
Hard disk	500 GB, blank	All models		HMIYHDD050011	–
Flash disk SSD	60 GB, blank	All models		HMIYSD006011	–
Compact Flash card (SLC technology)	2 GB, blank	All models		HMIYCFS0211	–
	4 GB, blank	All models		HMIYCFS0411	–
	8 GB, blank	All models		HMIYCFS0811	–
DVD-RW drive for slide-in rack (1)	CD-RW and DVD-RW reader/writer	BOX PC, 2 PCI and 5 PCI slots		HMIYDRDVDRW11	–
Slide-in adaptor for storage disk (7)	Used to insert a Hard disk or an SSD Flash disk in a slide-in rack	BOX PC, 2 PCI and 5 PCI slots		HMIYADSLIDEIN11	–
Additional DVI interface	Provides a second DVI interface	BOX PC, 2 PCI and 5 PCI slots		HMIYINDVIRGB11	–
DVI/VGA RGB adaptor	For connecting an RGB screen to the integrated DVI port	All models		HMIYADDVIRGB11	–
RAID PCI card with 2 redundant Hard disks (1)	PCI card equipped with two redundant Hard disks enterprise 24/7 ≥ 500 GB	All models		HMIYRAIDPCI11	–
Hard disk for RAID PCI card	Replacement Hard disk for RAID PCI card HMIYRAIDPCI11	BOX PC + RAID PCI card HMIYRAIDPCI11		HMIYRAIDD050011	–
Additional serial link interface	RS232C/RS422/RS485 serial link	All models		HMIYBINSL11	–
Backup power supply kit	Provides an uninterruptible power supply. Includes: ■ 1 backup battery ■ 1 x 3 m cordset	Magelis BOX PC configured with battery-backed power supply interface module (2)		HMIYUPSKT11	–
Power supply filter for marine certification	Necessary for compliance with marine certification.	BOX PC: HMIBUCND1E01 and HMIBUFND●P●1	–	HMIYLFIMAR11	–
Maintenance kit for BOX PC	Includes: ■ 1 x 3-way removable connector for 24 V ~ power supply ■ 15 replacement filters for fan, including: □ 5 for Magelis BOX PC - 1 PCI □ 5 for Magelis BOX PC - 2 PCI □ 5 for Magelis BOX PC - 5 PCI	All models		HMIYBMKT11	–
Fan kit for BOX PC	Enables: ■ Replacement of fans by the user ■ Flat mounting of fanless Magelis BOX PC (3)	BOX PC, 1 PCI		HMIYBFKT11	–
		BOX PC, 2 PCI		HMIYBFKT21	–
		BOX PC, 5 PCI		HMIYBFKT51	–
Software					
Vijeo Designer Run Time license for 1 workstation	Converts the 21-day trial version of Vijeo Designer Run Time Demo to an unlimited license.	All models		VJDSNRTMPC	–
Intelligent Data Service license extension for Vijeo Designer Run Time for 1 workstation	Used to track the process variables and all operator actions, and offers visibility of the key process values	All models (requires storage capacity ≥ 4 GB)		VJDSNTRCKV60M	–
External Phaseo power supply					
Phaseo regulated switch mode power supply ABL 8 Rail mounting	Input voltage: 100...120 V/200...500 V~ (4) Output voltage: 24 V ~ Power: 120 W	All models		ABL8RPS24050 (5) (6)	0.700/ 1.543
Phaseo regulated switch mode power supply ABL 4 Rail mounting	Input voltage: 100...230 V ~ (4) Output voltage: 24 V ~ Power: 120 W	All models		ABL4RSM24050 (5) (6)	0.500/ 1.102

(1) Operating temperature details available on our website www.schneider-electric.com.

(2) For configured Magelis BOX PC see page 3/10.

(3) Operating temperature for flat mounting: 0...45 °C (see pages 3/2 and 3/3).

(4) Single-phase connection. Phase-to-phase connection possible on certain American line supplies, please contact our Customer Care Center.

(5) If adding a PCI card, you need to select a Phaseo power supply with a power rating suitable for the extra consumption. Please refer to the "Phaseo power supply and transformer" catalog on our website www.schneider-electric.com.

(6) To order this reference, please contact our Customer Care Center.

(7) The user has to check for third party drive compliancy.

Configured Magelis BOX PC industrial PC

With the “configured PC” service, Schneider Electric offers a vast number of configuration combinations for Magelis PCs.

This service, available exclusively from our Customer Care Center, allows users to configure a certified product suitable for specific automation applications and environments, based on Universal and Performance Magelis BOX PCs.

Our Customer Care Center draws up:

- The complete parts list for the configured Magelis BOX PC
- Its selling price
- The complete reference (root + code which varies according to the configuration)
- A purchase order

Ordering procedure for a configured Magelis BOX PC

- 1 Please contact our Customer Care Center.
- 2 State the reference root **HMIPCCB1** corresponding to a request for a configured Magelis BOX PC. It will be completed with the variable part of the reference, once configuration is complete.
- 3 Configure your Magelis BOX PC (see table below).
- 4 Confirm your order.

References

Description	Reference	Weight kg/lb
Configured Magelis BOX PC (1)	Reference root to be stated to our Customer Care Center. The configuration should be made up from the components below.	HMIPCCB1 (2) —

Description	Available on Magelis BOX PC base		Reference	Weight kg/lb
	Universal	Performance		
	Processor Intel® ATOM™ N270 (1.6 GHz)	Intel® Core™ 2 Duo P8400 processor (2.26 GHz)		
	DDR2 RAM	DDR3 RAM		
	Supply voltage 24 V $\overline{\text{---}}$ supply voltage	24 V $\overline{\text{---}}$ supply voltage		
RAM	3 GB max. (DDR2)	8 GB max. (DDR3)	(2)	—
Peripheral storage devices	Compact Flash card 8 GB max. (SLC technology)			
	Up to 2 Flash disks SSD \geq 60 GB			
	Up to 2 Hard disks enterprise 24/7 \geq 500 GB			
Other peripheral device	DVD-RW drive			
PCI slot configuration	1 PCI or 1 PCI Express®			
	1 PCI + 1 PCI Express® or 2 PCI			
	2 PCI + 3 PCI Express® or 4 PCI + 1 PCI Express®			
Operating systems	Windows® Embedded Standard 2009			
	Windows® Embedded Standard 7 32-bit			
	Windows® XP PRO SP3			
	Windows® 7 Ultimate 32-bit			
	Windows® 7 Ultimate 64-bit			
Software	Vijeo Designer Run Time			
	Vijeo Citect			
Assembled options	RAID PCI card with 2 redundant Hard disks			
	Interface module for backup power supply required for the HMIYUPSKT11 backup power supply kit (see page 3/9)			
	Additional RS232C/RS422/RS485 serial link interface			
	Additional DVI interface (needs a configuration with 2 or 5 PCI/PCI Express® slots)			

(1) Please contact our Customer Care Center.

(2) The reference of configured Magelis BOX PC industrial PCs is made up of a root (HMIPCCB1) followed by a variable part generated during configuration.

Industrial PCs

Magelis™ iPCs certified for automation
Equivalent product table

Old industrial PCs		Replaced by Magelis BOX PCs	
Description	Reference	Description	References
Magelis Smart BOX		Magelis BOX PC (1 PCI slot)	
Magelis Smart BOX 100...240 V ~	MPCSN01NAJ00T	Universal Magelis BOX PC	HMIBUCND1E01 + Phaseo power supply (1)
Magelis Smart BOX 24 V ---	MPCSN01NDJ00T	Universal Magelis BOX PC	HMIBUCND1E01
Magelis Compact PC BOX (1 PCI slot)		Magelis BOX PC (1 PCI slot)	
Magelis Compact PC BOX 100...240 V ~	MPCKN02NAX00N	Universal Magelis BOX PC	HMIBUHND1P01 + Phaseo power supply (1)
Magelis Flex PC BOX F (2 PCI slots)		Magelis BOX PC (2 PCI slots)	
Magelis Flex PC BOX (Celeron M) 100...240 V ~	MPCFN02NAX00N	Universal Magelis BOX PC	HMIBUHND2P01 + Phaseo power supply (1)
Magelis Flex PC BOX (Celeron M) 24 V ---	MPCFN02NDX00N	Universal Magelis BOX PC	HMIBUHND2P01
Magelis Flex PC BOX (Core Duo) 100...240 V ~	MPCFN05NAX00N	Performance Magelis BOX PC	HMIBPHDD2701 + Phaseo power supply (1)
Magelis Flex PC BOX (Core Duo) 24 V ---	MPCFN05NDX00N	Performance Magelis BOX PC	HMIBPHDD2701
Magelis Flex PC BOX (Core Duo) 100...240 V ~	MPCFN05MAX00N	Performance Magelis BOX PC	HMIBPFDD2701 + Phaseo power supply (1)
Magelis Flex PC BOX (Core Duo) 100...240 V ~ Vijeo Citect Full 500 I/O	MPCFN05MAX00V	Performance Magelis BOX PC Vijeo Citect Full 500 I/O	HMIBPFDD27F1 + Phaseo power supply (1)
Magelis Flex PC BOX H (4 PCI slots)		Magelis BOX PC (5 PCI slots)	
Magelis Flex PC BOX (Celeron M) 100...240 V ~	MPCHN02NAX00N	Performance Magelis BOX PC	HMIBPHDD5701
Magelis Flex PC BOX (Core Duo) 100...240 V ~	MPCHN05NAX00N	Performance Magelis BOX PC	HMIBPHDD5701 + Phaseo power supply (1)
Magelis Flex PC BOX (Core Duo) 100...240 V ~ with backup battery	MPCHN05NBX00N	Configured Magelis BOX PC (2)	HMIPCCB1B5CB26K10N + kit HMIYUPSKT11 + Phaseo power supply (1)
Magelis Flex PC BOX (Core Duo) 24 V ---	MPCHN05NDX00N	Performance Magelis BOX PC	HMIBPHDD5701
Magelis Flex PC BOX (Core Duo) 100...240 V ~	MPCHN05MAX00N	Performance Magelis BOX PC	HMIBPFDD5701 + Phaseo power supply (1)
Magelis Flex PC BOX (Core Duo) 100...240 V ~ Vijeo Citect Full 500 I/O	MPCHN05MAX00V	Performance Magelis BOX PC Vijeo Citect Full 500 I/O	HMIBPFDD57F1 + Phaseo power supply (1)

(1) **ABL8RPS24050** or **ABL4RSM24050** Phaseo power supply (see page 3/9).
(2) See page 3/10.



- **How to find products?**
 - Search, visualize, and download *page 4/2*
 - Access product references with adapted tools *page 4/4*
 - Compare, select, and compile *page 4/6*
 - Check the product status, design your equipment *page 4/7*
- **Product references index** *Page 4/8*


Search, visualize, and download

Use your tablet or your PC to quickly access detailed and comprehensive information on our products



Tablets


Application name: "Automation Library by Schneider Electric"

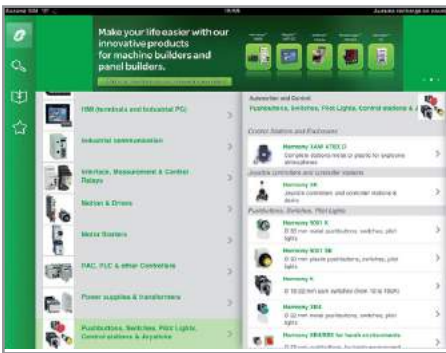

Product ranges displayed by function



Dynamic catalogs (hyperlinks, video, ...)

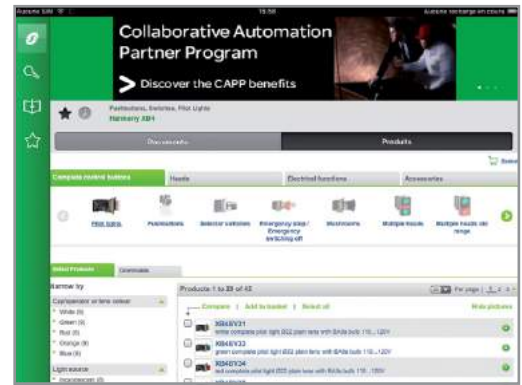


Product selector: dynamic filters to get easily your part number






Personal computer

Path: www.schneider-electric.com > **Products and Services** > Automation and control > Product offer

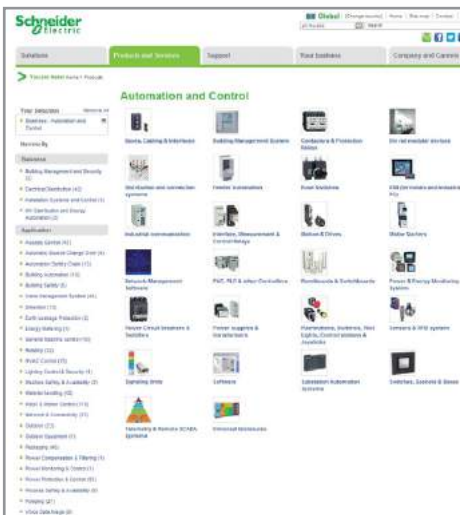

Product ranges displayed by function

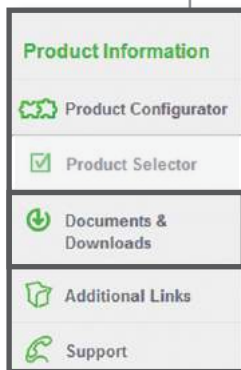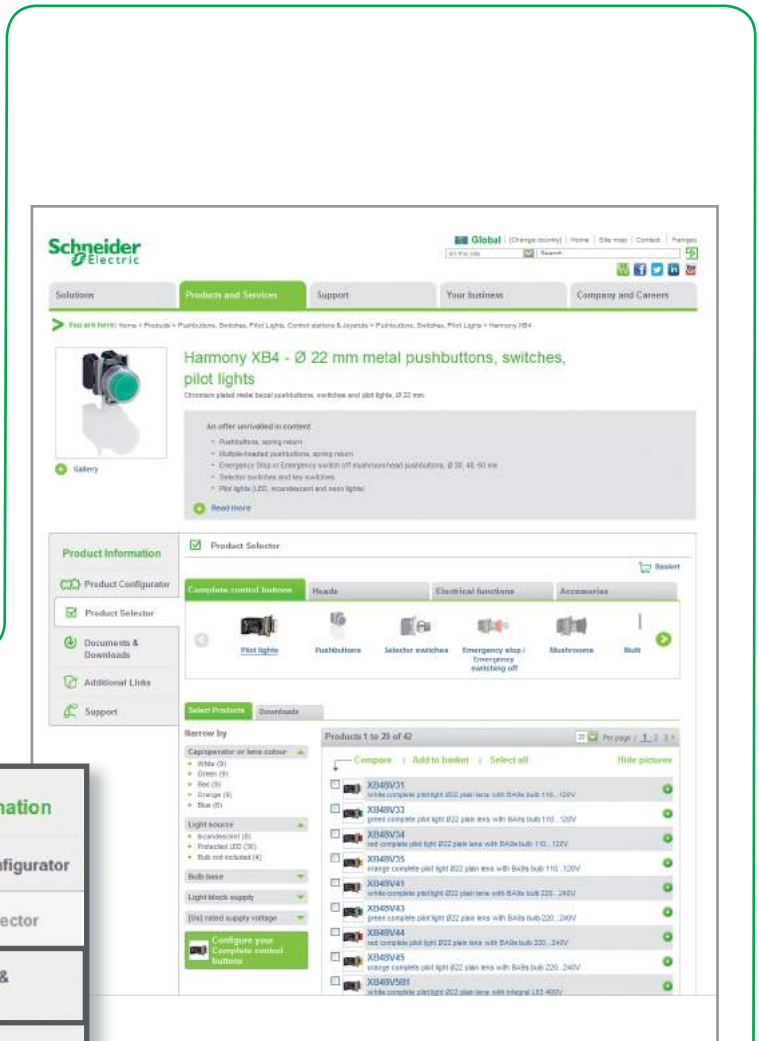


Dynamic catalogs (hyperlinks, video, ...)

Product selector: dynamic filters to get easily your part number

Access product references with adapted tools





Path: www.schneider-electric.com > **Products and Services** > Automation and control > ... > Product offer

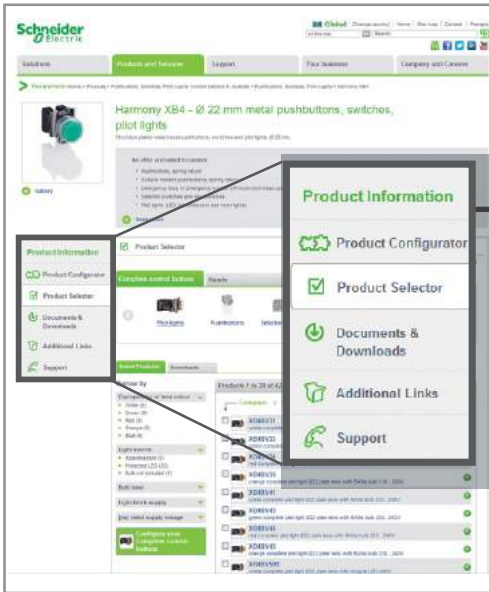

Graphic product configurator
Select the right product with just a few clicks

Dynamic product selector
Visualize product characteristics and dimensions

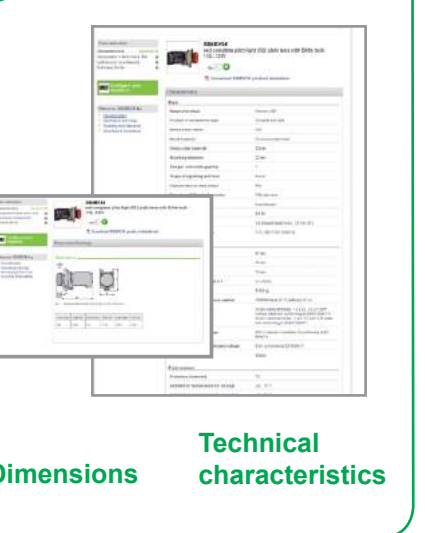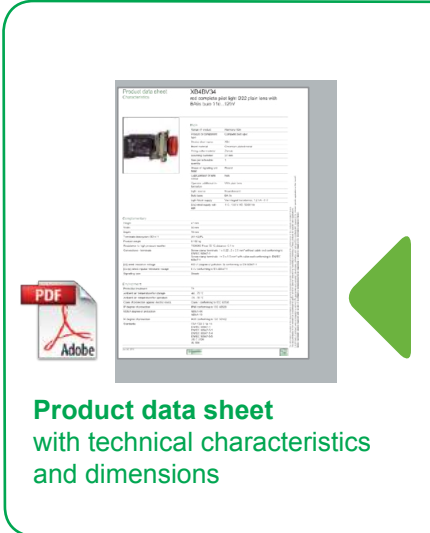

A	
ABL4RSM24050	2/28 3/9
ABL8RPS24050	2/28
ABL8RPS24050	3/9
H	
HMIBPFDD27F1	3/8 3/11
HMIBPFDD57F1	3/8 3/11
HMIBPFDD2701	3/8 3/11
HMIBPFDD5701	3/8 3/11
HMIBPHDD2701	3/8 3/11
HMIBPHDD5701	3/8 3/11
HMIB●●●●●●●●	2/31
HMIBUCND1E01	3/8 3/11
HMIBUFND1P01	3/8
HMIBUFND1PF1	3/8
HMIBUFND2P01	3/8
HMIBUFND2PF1	3/8
HMIBUHND1P01	3/8 3/11
HMIBUHND2P01	3/8 3/11
HMIDID7DT0	2/31
HMIPCCB1	3/10
HMIPCCB1B5CB 26K10N	3/11
HMIYUPSKT11	3/11
HMIPCCP	2/29 2/30
HMIPCCT	2/29 2/30
HMIPCCV	2/29
HMIPCCW	2/29
HMIPPF6A2701	2/13
HMIPPF7A27F1	2/23
HMIPPF7A2701	2/23
HMIPPF7D07F1	2/23
HMIPPF7D0701	2/23
HMIPPF9A27F1	2/25
HMIPPF9A2701	2/25
HMIPPF9D07F1	2/25
HMIPPF9D0701	2/25
HMIPPH6A2701	2/13
HMIPPH7A0701	2/23
HMIPPH7A2701	2/23
HMIPPH7B2701	2/23
HMIPPH7D0701	2/23
HMIPPH7D2701	2/23
HMIPPH9A0701	2/25
HMIPPH9A2701	2/25
HMIPPH9D0701	2/25
HMIPPH9D2701	2/25
HMIP●●7p●●●●	2/31
HMIP●●9●●●●●	2/31
HMIPRH7A2701	2/23

HMIPSC7AE03	2/30
HMIPSC7DE03	2/30
HMIPSF7AP03	2/30
HMIPSF7APF3	2/30
HMIPSF7APL3	2/30
HMIPSF7DP03	2/30
HMIPTF7D2P01	2/22 2/30
HMIPTH7D2P01	2/22 2/30
HMIPUC6A0E01	2/13 2/30
HMIPUC6D0E01	2/13 2/30
HMIPUC7D0E01	2/22 2/30
HMIPUC9D0E01	2/24
HMIPUF6A0701	2/13 2/30
HMIPUF6D0701	2/13
HMIPUF7A0P01	2/22 2/30
HMIPUF7A2P01	2/22 2/30
HMIPUF7A2PF1	2/22 2/30 2/31
HMIPUF7D0P01	2/22 2/30
HMIPUF7D0PL1	2/22 2/30
HMIPUF9A2P01	2/24
HMIPUF9A2PF1	2/24
HMIPUF9D0P01	2/24
HMIPUF9D0PF1	2/24
HMIPUH6A0701	2/13 2/30
HMIPUH6D0701	2/13
HMIPUH7A0P01	2/22
HMIPUH7A2P01	2/22 2/30
HMIPUH7D0P01	2/22
HMIPUH7D2P01	2/22 2/30
HMIPUH9A0P01	2/24
HMIPUH9A2P01	2/24
HMIPUH9D0P01	2/24
HMIPUH9D2P01	2/24
HMIPVC7D0E01	2/5 2/30
HMIPWC5D0E01	2/5 2/30
HMIPWC5D0E01A	2/5
HMIPWC7D0E01	2/5 2/30
HMIYADCFast61	2/26
HMIYADDVIRGB11	2/27 3/9
HMIYADSLIDEIN11	2/27 3/9
HMIYADSLIDEIN61	2/26
HMIYBFKT11	3/9
HMIYBFKT21	3/9
HMIYBFKT51	3/9
HMIYBINSL11	3/9

HMIYBMKT11	3/9
HMIYCABDVI1011	2/27
HMIYCFA04	2/26
HMIYCFA08	2/26
HMIYCFA16	2/26
HMIYCFS0211	2/27 3/9
HMIYCFS0411	2/27 3/9
HMIYCFS0811	2/27 3/9
HMIYDRDVRW11	2/27 3/9
HMIYDRDVRW61	2/26
HMIYHDD050011	2/27 3/9
HMIYHDD50061	2/26
HMIYINDVIRGB11	3/9
HMIYLFIMAR11	2/27 3/9
HMIYPCI161	2/26
HMIYPCI261	2/26
HMIYPCIA61	2/26
HMIYPCIC61	2/26
HMIYPFKT01	2/27
HMIYPFKT21	2/27
HMIYPFKT061	2/26
HMIYPINSL61	2/26
HMIYPINSRAM61	2/26
HMIYPMAC61	2/26
HMIYPMKT11	2/27
HMIYPMKT61	2/26
HMIYPRAM302061	2/26
HMIYPRAM304061	2/26
HMIYPRAM308061	2/26
HMIYUPSINT61	2/26
HMIYUSBUN511	2/27
HMIYRAIDD050011	2/27 3/9
HMIYRAIDPCI11	2/27 3/9
HMIYSDD006011	2/27 3/9
HMIYSDD06061	2/26
HMIYSDD18061	2/26
HMIYUPSKT11	2/27 3/9 3/11
HMIYUPSKT61	2/26
HMIZSD4G	2/27
H●●●●●●●●	2/31
M	
MPCFN02NAX00N	3/11
MPCFN02NDX00N	3/11
MPCFN05MAX00N	3/11
MPCFN05MAX00V	3/11
MPCFN05NAX00N	3/11
MPCFN05NDX00N	3/11
MPCHN02NAX00N	3/11
MPCHN05MAX00N	3/11
MPCHN05MAX00V	3/11

MPCHN05NAX00N	3/11
MPCHN05NBX00N	3/11
MPCHN05NDX00N	3/11
MPCKN02NAX00N	3/11
MPCKT22MAX20N	2/30
MPCKT22NAX20N	2/30
MPCKT55MAX20L	2/31
MPCKT55MAX20N	2/30
MPCKT55MAX20V	2/31
MPCKT55NAX20N	2/30
MPCKT55NDX20N	2/30
MPCNB50NAN00N	2/31
MPCSN01NAJ00T	3/11
MPCSN01NDJ00T	3/11
MPCST11NAJ00T	2/30
MPCST11NDJ00T	2/30
MPCST21NAJ20T	2/30
MPCST21NDJ20T	2/30
MPCST52NAJ20H	2/30
MPCST52NAJ20T	2/30
MPCST52NDJ20T	2/30
MPCYB20NNN00N	2/31
MPCYB50NNN00N	2/31
MPCYK20SPSKIT	2/26 2/27
MPCYK50SPSKIT	2/27
MPCYK90SPSKIT	2/27
MPCYT50NAN00N	2/31
MPCYT50NNN00N	2/31
MPCYT90NAN00N	2/31
MPCYT90NNN00N	2/31
V	
VJDSNRTMPC	2/28 3/9
VJDSNTRCKV60M	2/28 3/9

VICPAS[®]

.com



sales@vicpas.com



+86-15876525394